



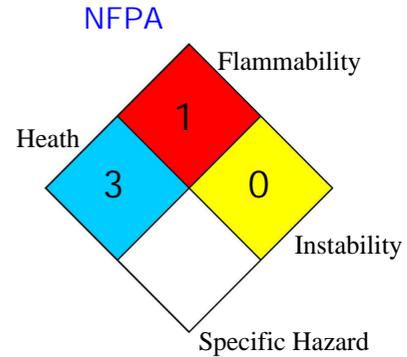

Baker Petrolite
A Baker Hughes Company
12645 W. Airport Boulevard
Sugar Land, TX 77478

Emergency Telephone Numbers:
CHEMTREC 800-424-9300
CHEMTREC Intl.: 01-703-527-3887
Baker Petrolite Corporation: 1-800-231-3606
For Emergencies or Product Information: (001)281-276-5400

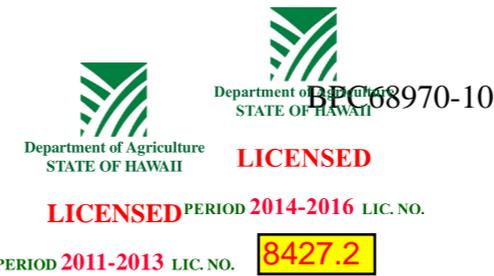

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
DANGER
KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes irreversible eye damage. Causes skin burns. Harmful if inhaled. May be fatal if swallowed. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Causes asthmatic signs and symptoms in hyper-reactive individuals. Do not get in eyes, on skin, on clothing. Avoid breathing vapor. Do not swallow. Wear goggles, protective clothing, and butyl or nitrile gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND HANDLING

BPC 68970 is incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. **BPC 68970** can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about 1 °F (-17°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated, but the preferred maximum storage temperature is about 80°F (26.7°C). A stainless steel centrifugal pump is suggested for transfer service. Spiral-wound stainless steel with TEFLON® polymer is suitable for gaskets and packing.

Handle in well-ventilated area. If vapors are irritating to the nose or eyes, special ventilation or respiratory protection (MSHA/NIOSH approved air purifying respirator equipped with an organic vapor cartridge) may be required.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable containers of all sizes. Do not reuse or refill this container. Triple or pressure rinse (or equivalent) promptly after emptying. Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or other procedures approved by state and local authorities.

BEFORE HANDLING OR USING THIS PRODUCT, SEE YOUR EMPLOYER AND READ CURRENT MATERIAL SAFETY DATA SHEET.

LIMITED WARRANTY AND DISCLAIMER

Seller warrants that the product conforms to its chemical description as contained on the label and is reasonably fit for the purposes stated on this label when used in accordance with directions under normal conditions of use. THE WARRANTIES MADE IN THIS PARAGRAPH ARE SELLER'S SOLE WARRANTIES WITH RESPECT TO THE PRODUCT AND ARE MADE EXPRESSLY IN LIEU OF AND EXCLUDE ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE AND ALL OTHER EXPRESS OR IMPLIED REPRESENTATIONS AND WARRANTIES.

Read Product Material Safety Data Sheet prior to use. PRODUCT WARRANTY, DISCLAIMER AND LIMITATION OF LIABILITY ARE FOUND THEREON. Use of Product signifies agreement with these provisions.

BPC 68970

A highly effective Microbiocide for use in controlling bacteria including slime forming bacteria, sulfate-reducing bacteria, fungi (yeast and molds) and algae in air washers and industrial scrubbing systems, recirculating cooling and process water systems, including those that contain reverse osmosis membranes and service water and auxiliary systems, heat transfer systems, wastewater systems including wastewater sludge and holding tanks.

ACTIVE INGREDIENT:
Glutaraldehyde 45.0%
INERT INGREDIENT(S): 55.0%
TOTAL: 100.0%

KEEP OUT OF REACH OF CHILDREN
DANGER

FIRST AID	
IF SWALLOWED	<ul style="list-style-type: none"> Call a poison control center or a doctor immediately for treatment advice. DO NOT INDUCE VOMITING. Do not give anything to drink.
IF IN EYES	<ul style="list-style-type: none"> Wash immediately and continuously with flowing water for at least 30 minutes. Remove contact lenses after the first 5 minutes and continue washing. Obtain prompt medical consultation, preferably from an ophthalmologist. Call a poison control center or a doctor immediately for treatment advice.
IF ON SKIN OR CLOTHING	<ul style="list-style-type: none"> Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or a doctor for treatment advice.
IF INHALED	<ul style="list-style-type: none"> Move person to fresh air. If person is not breathing, call 911 or an ambulance, and then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or a doctor for further treatment advice.
NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage. Have the MSDS and, if available, the product container or label with you when calling a poison control center, or a doctor, or going for treatment.	
IN CASE OF EMERGENCY endangering life or property involving this product, call 800-231-3606.	

EPA Registration Number	464-692-10707	
EPA Establishment Numbers	10352-WV-2 ^(A)	464-WV-1 ^(B)
	10707-TX-007	10707-LA-001
	10707-CA-012	

^(A)5 gallon pails in pallets; all drums; bulk, ^(B)Single 5 gallon pails only

SEE SIDE PANELS FOR ADDITIONAL PRECAUTIONARY STATEMENTS

DISTRIBUTED BY:
BAKER PETROLITE CORPORATION
12645 WEST AIRPORT BLVD.
SUGAR LAND, TX 77478

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**AIR WASHERS AND INDUSTRIAL SCRUBBING SYSTEMS/
RECIRCULATING COOLING AND PROCESS WATER SYSTEMS**

This product may be used only in industrial air washers and air washer systems which have mist-eliminating components.

BPC 68970 should be added at the application rates described below, to a water treatment system at a convenient point of uniform mixing such as the basin area. Addition may be made intermittently (SLUG DOSE) or continuously. Badly fouled systems can be shock treated with **BPC 68970**. Under these conditions, blowdown should be discontinued for up to 24 hours.

BPC 68970 can be used in industrial process water systems that contain ultra filtration units and non-medical reverse osmosis membranes (where approved for compatibility by the membrane manufacturer) and associated distribution systems.

INTERMITTENT (SLUG DOSE) METHOD

Initial Dose: When the system is noticeably fouled, apply 12.7 to 25.4 fluid ounces of **BPC 68970** per 1,000 gallons of water in the system. Repeat until control is achieved.

Subsequent Dose: When microbial control is evident, add 5.1 to 12.7 fluid ounces of **BPC 68970** per 1,000 gallons of water in the system weekly, or as needed to maintain control. Badly fouled systems must be cleaned before treatment is begun.

CONTINUOUS FEED METHOD

Initial Dose: When the system is noticeably fouled, apply 12.7 to 25.4 fluid ounces of **BPC 68970** per 1,000 gallons of water in the system.

Subsequent Dose: Maintain this treatment level by starting a continuous feed of 2.5 to 12.7 fluid ounces of **BPC 68970** per 1,000 gallons of water in the system per day. Badly fouled systems must be cleaned before treatment is begun.

SERVICE WATER AND AUXILIARY SYSTEMS

BPC 68970 should be used at the same application rates, and in the same manner as described above. It should be added to the system at a point that will allow for uniform mixing throughout the system.

HEAT TRANSFER SYSTEMS

(Evaporative Condensers, Dairy Sweetwater Systems, Hydrostatic Sterilizers and Retorts and Pasteurizers and Warmers)

BPC 68970 should be used at the same application rates, and in the same manner as described above. It should be added to the system at a point of uniform mixing such as a basin area, sump area or other reservoir or collecting area from which the treated water will be circulated uniformly throughout the system.

INDUSTRIAL WASTEWATER SYSTEMS

(Wastewater Systems, Wastewater Sludge and Wastewater Holding Tanks)

BPC 68970 should be added to a wastewater system or sludge at a convenient point of uniform mixing such as the digester. Add 0.45 to 2.2 gallons (500 to 2,500 ppm **BPC 68970**) per 1,000 gallons of wastewater or sludge.



NOTICE
Do Not Ship or Store
with Food, Feeds, Drugs,
or Clothing

NET CONTENTS: 5, 30 or 55 Gallons, Bulk or As Marked on Container

Rev 07/11

Affix Poisonous Material (6.1) label

Affix Corrosive (8) label

Flashpoint: 100 C 237.6 F

Fill Date: 07/27/11

Lot No:

Inspection Lot No:

Gross Weight (lbs): 527

Gross Weight (Kg): 239

Net Weight (lbs): 504

Net Weight (Kg): 229

Marine Pollutant (Glutaraldehyde.)

UN2922 CORROSIVE LIQUID,
TOXIC, N.O.S.(Glutaraldehyde)
Class 8(6.1), PG II Marine
Pollutant (Glutaraldehyde)
Emergency Response Code #: 154

Lea la hoja de datos de seguridad de materiales del producto antes de usarlo. LA GARANTIA DEL PRODUCTO, EL DESCARGO Y LA LIMITACION DE RESPONSABILIDAD SE ENCUENTRAN EN DICHOS DOCUMENTOS. El uso del producto significa acuerdo con estas disposiciones.