



STATE OF HAWAII  
 Department of Agriculture  
**ACCEPTED**  
 LICENSE NO. **9163.74**

# HDX™

## Floating Chlorinator

- For day-to-day chlorination
- Kills algae and bacteria
- Built in sun protection

**KEEP OUT OF REACH OF CHILDREN  
 DANGER**

See back panel for other precautions

ACTIVE INGREDIENT:  
 Trichloro-s-triazinetrione.....95.0%  
 OTHER INGREDIENTS.....5.0%  
 TOTAL.....100.0%  
 (85.0% Available Chlorine)

SKU 694 482



**Sanitize**

**STEP 2**

**4 lbs (64 oz)**

**FIRST AID:** Call a poison control center or doctor for treatment advice. Have the product container or label with you when calling poison control center or doctor, or going for treatment. **IF IN EYES:** Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. **IF ON SKIN OR CLOTHING:** Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. **IF INHALED:** Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration preferably mouth-to-mouth, if possible. **IF SWALLOWED:** Have person sip a glass of water if able to swallow. DO NOT induce vomiting unless told to do so by the poison control center or doctor. Do not give anything by mouth to an unconscious person. **NOTE TO PHYSICIAN:** Probable mucosal damage may contraindicate the use of gastric lavage.

NET WT. 4 LBS (64 OZ)

## DIRECTIONS FOR USE:

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

**POOL START UP AND HEAVY BATHER LOAD:** At the start of the swimming season, in filled pools, upon filling a pool, and after heavy swimmer load, super-chlorination (shocking) is necessary. Super-chlorination is the addition of two or three times the normal amount of chlorine to oxidize and remove unwanted organic and inorganic material. The end result is the establishment of a chlorine residual of 1.0–1.5 ppm. A liquid or granular chlorinating agent, including HDX SHOCK 10,000 GALLONS, HDX SUPER SHOCK 20,000 GALLONS or HDX ALL-IN-ONE CHLORINATING GRANULES, which will dissolve rapidly, must be used for super-chlorination. Consult the labels on HDX SHOCK 10,000 GALLONS, HDX SUPER SHOCK 20,000 GALLONS or HDX ALL-IN-ONE CHLORINATING GRANULES for super-chlorination instructions. Do not use pool during super-chlorination until the chlorine residual is less than 3.0 ppm.

### USE OF THE FLOATING CHLORINATOR

Do not use in spas, hot tubs or in water temperatures above 90° F.


1. To use this container, cut off the two large knobs nearest the cap (at opposite sides). Locate and remove the small knob which corresponds to the pool capacity in gallons (Fig. 1). Holding the HDX FLOATING CHLORINATOR neck down, shake lightly to level contents. HDX FLOATING CHLORINATOR contains HDX 1" TABS (slow dissolving, stabilized and highly concentrated).

2. Place HDX FLOATING CHLORINATOR into the pool water neck down (Fig. 2).

Monitor chlorine feed setting using a reliable test kit; chlorine residual should read from 1 – 1.5 ppm. To increase chlorine residual, cut off the small knob for the next higher pool capacity. As part of routine maintenance, super chlorinate regularly using an unstabilized chlorine product. Adjust pH as needed with HDX pH PLUS or HDX pH MINUS keeping it between a pH of 7.2 - 7.6 range. To minimize chlorine consumption, add HDX STABILIZER CONDITIONER as needed to give a concentration of 30 ppm. Follow the instructions provided on these labels.

3. HDX FLOATING CHLORINATOR tilts when empty. Drain all water and remove safety cap to refill. Use HDX 1" TABS only. Never mix with any other chemicals or tablets. DO NOT OVERFILL (Fig. 3). When HDX FLOATING CHLORINATOR shows signs of brittleness or cracking, it should be replaced.

Mix only with water. Use clean dry utensils. Do not add this product to any dispensing device containing remnants of any other product. Such use may cause a violent reaction leading to fire or explosion. Contamination with moisture, organic matter, or any other chemicals may start a chemical reaction with generation of heat, liberation of hazardous gases, and possible generation of fire and explosion.

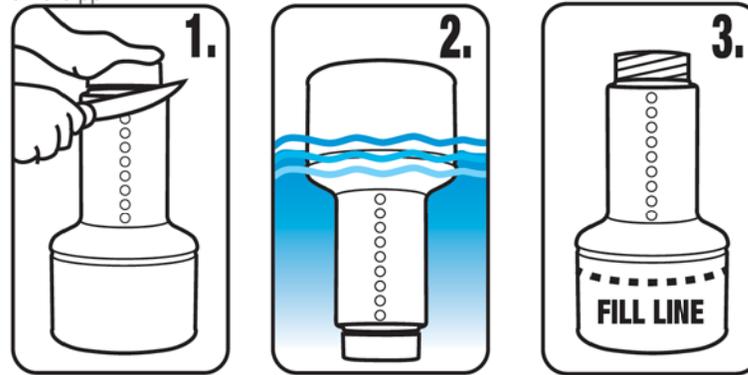

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER. CORROSIVE:** Causes irreversible eye damage and skin burns. May be fatal if absorbed through skin. May be fatal if inhaled. Do not breathe dust or spray mist. Irritating to nose and throat. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield, protective clothing and rubber gloves when handling this product. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove contaminated clothing and wash clothing before reuse.

**ENVIRONMENTAL HAZARDS:** This product is toxic to fish and aquatic organisms.

**PHYSICAL OR CHEMICAL HAZARD:** STRONG OXIDIZING AGENT. WILL BURN WITH THE EVOLUTION OF CHLORINE OR EQUALLY TOXIC GASES. CONTACT WITH WATER SLOWLY LIBERATES IRRITATING AND TOXIC HAZARDOUS CHLORINE CONTAINING GASES. DECOMPOSES AT 460° F TO 480° F WITH LIBERATION OF HARMFUL GASES. **IN CASE OF FIRE**, if possible, isolate container in open air or well ventilated area. Flood with large volume of water. **IN CASE OF CONTAMINATION OR DECOMPOSITION**, do not reseal container.

### STORAGE AND DISPOSAL:

Do not contaminate water, food, or feed by storage and disposal.

**STORAGE:** Keep product in tightly closed container when not in use. Store in a cool, dry, well ventilated area away from heat or open flame or in case of decomposition, isolate container in open area if possible, and flood with large amounts of water. **CONTAINER**

**HANDLING: FLOATING CHLORINATOR DISPOSAL:** Triple rinse cracked or broken containers and offer for recycling. If recycling is not available, discard in trash.

**NOTE:** Do not allow direct contact of this product on the following pool surfaces: vinyl, metallic, fiberglass, painted or colored plaster. Product will bleach color out.

**EPA Reg. No. 7616-76**  
**EPA Est. No. 7616-CA-1**

**MANUFACTURED BY:**  
**KIK POOL ADDITIVES INC.**  
5160 E. AIRPORT DRIVE  
ONTARIO, CA 91761-7824

**MARKETED THROUGH:**  
**HOME DEPOT**  
2455 PACES FERRY RD., N.W.  
ATLANTA, GA 30339

