

DISCONTINUED

DIRECTIONS FOR USE:

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

For application to underwater areas of steel, aluminum, fiberglass or wood vessels subject to fouling by barnacles, algae, tube worm and other fouling organisms. Surface to be coated should be clean of grease, oil, dirt and moisture. Do not apply directly to metal surfaces. A suitable barrier coat should be applied to steel and aluminum surfaces. Apply by spray, brush or roller. For spray, airless spray is strongly recommended. When spraying, applicators must use appropriate NIOSH approved respirators. Protective clothing, rubber gloves and goggles should be worn by applicators. Contaminated clothing should be laundered before reuse. Clean up with R1K3 thinner. Launching may be accomplished as soon as coating is dry, or later if desired.

FOR USE IN COMMERCIAL SHIPYARDS ONLY


STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

PESTICIDE DISPOSAL - Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL - Triple rinse (or equivalent) and offer for recycling or reconditioning, or dispose of in a sanitary landfill, or by other approved State and local authorities.

Emergency (incase of spills or leaks) 216-566-2917.

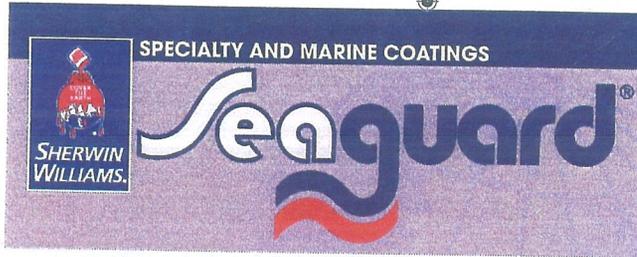

ABLATIVE II MARINE ANTI-FOULING PAINT

RED

FOR USE IN COMMERCIAL SHIPYARDS ONLY

P30 RQ 25

894-3011

ACTIVE INGREDIENTS:

CUPROUS OXIDE	47.99%	EPA Reg. No.	
INERT INGREDIENTS	52.01%	8120-61-577	
Total	100.00%	EPA EST. No.	
Equivalent to 42.0% Metallic Copper		8120-AR-1	
Contains petroleum distillates			

**KEEP OUT OF REACH OF CHILDREN
WARNING.**
See side panel for
precautionary statements.

5 U.S. Gal / 18.9 L



Precautionary Statements WARNING

HAZARDS TO HUMANS AND DOMESTIC ANIMALS. Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear a face shield and rubber gloves when handling. Use in a well ventilated area. When used in confined areas or applied by spraying, wear protective clothing and a pesticide respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist.

PRACTICAL TREATMENT. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If inhaled, remove to fresh air. Use artificial respiration if breathing has stopped. Get medical attention. If swallowed, do not induce vomiting. This product contains petroleum distillates. Get medical attention. If in eyes, immediately flush with plenty of water. Get medical attention.

Note to Physician

Contains petroleum distillate-vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS.

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose waste debris at an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS.

Do not use or store near heat and open flame.

Note: This product contains a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

VOC: 400 g/L (3.33 lbs/gal)
DO NOT THIN INCONSISTENT WITH
LOCAL VOC REGULATIONS.



SHWMAR0015_20
175603 162501
12/12/06 12:33:37 PM

Distributed by:
The Sherwin-Williams Company
Cleveland, Ohio 44115
©2005 The Sherwin-Williams Company

DISCONTINUED

DIRECTIONS FOR USE:

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

For application to underwater areas of steel, aluminum, fiberglass or wood vessels subject to fouling by barnacles, algae, tube worm and other fouling organisms. Surface to be coated should be clean of grease, oil, dirt and moisture. Do not apply directly to metal surfaces. A suitable barrier coat should be applied to steel and aluminum surfaces. Apply by spray, brush or roller. For spray, airless spray is strongly recommended. When spraying, applicators must use appropriate NIOSH approved respirators. Protective clothing, rubber gloves and goggles should be worn by applicators. Contaminated clothing should be laundered before reuse. Clean up with R1K3 thinner. Launching may be accomplished as soon as coating is dry, or later if desired.

FOR USE IN COMMERCIAL SHIPYARDS ONLY


STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

PESTICIDE DISPOSAL - Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL - Triple rinse (or equivalent) and offer for recycling or reconditioning, or dispose of in a sanitary landfill, or by other approved State and local authorities.

Emergency (in case of spills or leaks) 216-566-2917.

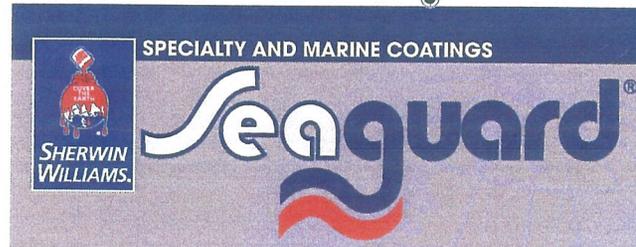

ABLATIVE II MARINE ANTI-FOULING PAINT

BLACK

FOR USE IN COMMERCIAL SHIPYARDS ONLY

P30 BQ 20

894-3029

ACTIVE INGREDIENTS:

CUPROUS OXIDE	47.99%	EPA Reg. No.	
INERT INGREDIENTS	52.01%	8120-61-577	
Total	100.00%	EPA EST. No.	
		8120-AR-1	

Equivalent to 42.0% Metallic Copper
Contains petroleum distillates

5 U.S. Gal / 18.9 L

KEEP OUT OF REACH OF CHILDREN
WARNING.
See side panel for
precautionary statements.



Distributed by:
The Sherwin-Williams Company
Cleveland, Ohio 44115
©2006 The Sherwin-Williams Company

Precautionary Statements WARNING

HAZARDS TO HUMANS AND DOMESTIC ANIMALS. Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear a face shield and rubber gloves when handling. Use in a well ventilated area. When used in confined areas or applied by spraying, wear protective clothing and a pesticide respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist.

PRACTICAL TREATMENT. In case of skin contact, remove contaminated clothing and immediately wash skin with soap and water. Get medical attention. Wash contaminated clothing before reuse. If inhaled, remove to fresh air. Use artificial respiration if breathing has stopped. Get medical attention. If swallowed, do not induce vomiting. This product contains petroleum distillates. Get medical attention. If in eyes, immediately flush with plenty of water. Get medical attention.

Note to Physician

Contains petroleum distillate-vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS.

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose waste debris at an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS.

Do not use or store near heat and open flame.

Note: This product contains a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

VOC: 400 g/L (3.33 lbs/gal)
**DO NOT THIN INCONSISTENT WITH
LOCAL VOC REGULATIONS.**



0 35777 78991 9

SWIMAR0015_20
175604 162501
12/12/06 12:33:36 PM