

LICENSED
HAWAII
DEPT. OF AGRICULTURE
Rev. 2002-2004 9669.165
Period



LICENSED

LICENSED

PERIOD 2011-2013 LIC. NO. PERIOD 2014-2016 LIC. NO.

9669.165




Interlux®

LICENSED

PERIOD 2008-2010 LIC. NO.

Micron® 66

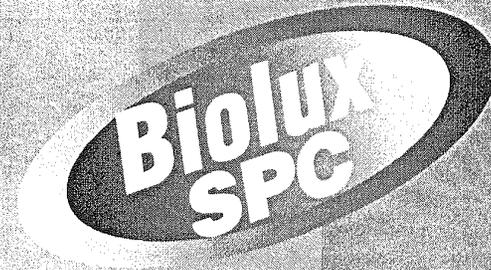

For Professional Use
 True Self-Polishing Copolymer Provides Outstanding Antifouling Protection
 Can be used on any size boat without TBT Restriction
 Biolux® Boosts Performance by Controlling Slime

KEEP OUT OF REACH OF CHILDREN
 WARNING

NET CONTENTS:
 ONE U.S. GALLON (3.785 L)

YBA471
 GREEN

| ACTIVE INGREDIENTS: | PERCENT |
|-------------------------------|---------|
| CUPROUS OXIDE | 40.41% |
| ZINC 2-PYRIDINETHIOL 1-OXIDE* | 6.81% |
| INERT INGREDIENTS | 55.78% |
| | 100.00% |

COPPER AS METALLIC 36.57%

CONTAINS PETROLEUM DISTILLATES

* ZINC PYRITHIONE

EPA EST 2693-NJ-1

EPA REG NO. 2693-187

yachtpaint.com

MICRON® 66 with Biolux®

PRODUCT DESCRIPTION: Micron® 66 is a long lasting Self-Polishing Copolymer that is formulated to provide powerful antifouling performance without using TBT. This self-polishing copolymer resin and Biolux® technology enables Micron® 66 to provide a level of antifouling protection not previously available in any paint system. This technology also allows the boat to be hauled and launched without recoating. Because Micron® 66 polishes it will become smoother with use, which will reduce drag and fuel consumption. The polishing action of Micron® 66 also reduces build-up of old spent coatings and minimizes sanding at reapplication. Micron® 66 is for use below the waterline on fiberglass, wood and properly primed metal boat hulls and parts, in salt and brackish waters. Do not use in fresh water.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PREPARATION

PREVIOUSLY PAINTED - GOOD CONDITION: Sand the surface with 80-grit sandpaper to a clean firmly attached surface, wipe with Special Thinner 216.

PREVIOUSLY PAINTED - POOR CONDITION: Remove all old antifouling paint using Interstrip™ 299E. Sand and wipe clean with Fiberglass Solvent Wash 202.

BARE FIBERGLASS - (POLYESTER OR VINYLESTER)

SURFACE PREPARATION: Wipe surface with Fiberglass Solvent Wash 202 or use Fiberglass Surface Prep YMA601.

BARE FIBERGLASS - NO SAND SYSTEM: Repair any surface imperfections using Watertite®. Sand and wipe clean. Apply one thin, continuous coat of Interlux® Fiberglass No-Sand Primer. Follow application directions for primer.

BARE FIBERGLASS - SANDING SYSTEM: Sand the entire surface with 80-grit sandpaper and wipe with Fiberglass Solvent Wash 202. Repair any surface imperfections with Watertite®. Sand and wipe clean.

BARE WOOD: Sand the surface with 80-grit sandpaper, wipe surface with Special Thinner 216. Apply the first coat 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux® Seam Compound 33 (if necessary). Repair imperfections with Watertite. Sand and wipe clean. Apply 2 additional coats.

ALUMINUM AND STEEL: Contact the Interlux® Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals.

APPLICATION

MIXING AND THINNING INSTRUCTIONS: Shake and mix well. Stir continuously while using. Thin only when necessary with Interlux® Brush Ease 433 (not to exceed 10% by volume).

GENERAL APPLICATION PROCEDURES: Apply at least 2 full coats by brush or (solvent resistant) 3/8" nap roller. If during application, brush pulls or roller drags, use Interlux® Brush Ease 433 to improve handling. Apply an extra coat to high wear areas such as the waterline, bow, and keel areas.

THINNER: Special Thinner 216 or Brush-Ease 433. Do not exceed 10% maximum

CLEAN UP: Special Thinner 216 or Brush Ease 433

THEORETICAL COVERAGE: 320 square feet per gallon, per coat at 2.0 mil D.F.T.

V.O.C.: less than 525 grams/liter

APPLICATION TEMPERATURE: 50°F (10°C) and above (air and hull)

CLEAN UP: For tools, equipment, etc. use 216 Interlux® Special Thinner or 433 Interlux® Brush-Ease 433.

Dry Time Chart

| Temperature °F (°C) | Touch Dry | Overcuring Time | |
|------------------------|--------------|-----------------|---------------------------|
| | | Minimum | Immersion Time Minimum |
| 50°F (10°C) | 3 Hours | 16 Hours | 16 Hours |
| 60°F (15°C) | 2 Hours | 12 Hours | 12 Hours |
| 75°F (24°C) | 1 Hour | 12 Hours | 12 Hours |
| 95°F (35°C) | 30 Minutes | 8 Hours | 8 Hours |

Caution: If this product is to be sprayed, it must only be applied by competent professional spray applicators utilizing the proper solvent and safety equipment.

Color difference may occur between actual paint and color swatch on front of can.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN

WARNING

Causes eye and skin irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as protective eyewear, gloves, long-sleeved cotton shirt, long pants, and hat. Harmful if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate - vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: FLAMMABLE! Keep away from heat and open flame.

STORAGE AND DISPOSAL: Do not contaminate water, food or feed by storage or disposal.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Open dumping is prohibited. Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

CONTAINER DISPOSAL: Triple rinse (or equivalent) and dispose of in an approved landfill. Consult Federal, State or local disposal authorities for approved alternative procedures.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT)
MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-954-6813.

Rev. 7/02

Interlux

International Paint Inc.

2270 Morris Ave., Union, NJ 07083 • 908-686-1300

AKZO NOBEL