



STATE OF HAWAII
Department of Agriculture

ACCEPTED

LICENSE NO. **9669.200**



Micron[®]CF

Copper Free Antifouling



yachtpaint.com

KEEP OUT OF REACH OF CHILDREN

DANGER

See Side Panel for Additional Precautionary Statements

NET CONTENTS
ONE U.S. GALLON (3.785 L)

YBC100
BLUE



AkzoNobel

ACTIVE INGREDIENTS

1H-PYRROLE-3-CARBONITRILE,	
4-BROMO-2-(4-CHLOROPHENYL)	3.90%
-5-(TRIFLUOROMETHYL)	
ZINC 2-PYRIDINETHIOL 1-OXIDE*	4.12%
INERT INGREDIENTS	91.98%
	100.00%

CONTAINS PETROLEUM DISTILLATES
*ZINC PYRITHIONE

EPA EST NO. 2693-NJ-1
EPA REG NO. 2693-230

MICRON® CF

PRODUCT DESCRIPTION: Micron CF is a copper free antifouling that provides excellent protection from shell and weed fouling. It uses Biolux® technology to block slime and E-cone to ward off barnacles and zebra mussels. The fast dry formula of Micron CF allows the boat to be painted and launched quickly and its ablatant action reduces paint build up and helps to improve fuel efficiency. Micron CF is available in bright colors and is suitable for use on all boats including fiberglass, aluminium, wood ad steel and can be used in wall waters. Micron CF can be brush or roller applied.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labelling. **GENERAL APPLICATION PROCEDURES:** For applications by residential (non-commercial) users: Do not apply by airless spray. Do not apply more than one coat of this product within 24 hours. Apply only in outdoor, non-enclosed spaces. Apply at least 2-3 full coats of Micron CF by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline and the bow stern polish faster than other areas. On these areas we suggest an additional coat of paint to insure that the Micron CF does not polish away before other areas of the bottom.

Approximate time it will take to paint your boat.

Boat Size / Application Time ;

14' 40 Minutes per coat; 20' 1 Hour 20 Minutes per coat; 30' 2 Hour 40 Minutes per coat

V.O.C: Less than 330 grams/liter (2.75 lbs./gallon)

THEORETICAL COVERAGE: 528 ft²/gal (2 mils dry film thickness).

THINNER: Special Thinner 216

THINNING: Do not exceed 10% by volume.

DRY TIMES

Temperature Temperatura °F (°C)	Touch Dry / Secado al Tacto	Overcoating Time/ Tiempo de Exposición Entre Capas		Immersion Time / Tiempo de Inmersión	
		Min	Max	Min	Max
41°F (5°C)	6 Hours/Horas	12 Hours/Horas	N/A	18 Hours/Horas	N/A
50°F (10°C)	3 Hours/Horas	6 Hours/Horas	N/A	9 Hours/Horas	N/A
73°F (23°C)	2 Hours/Horas	4 Hours/Horas	N/A	6 Hours/Horas	N/A
95°F (35°C)	1 Hours/Horas	2 Hours/Horas	N/A	4 Hours/Horas	N/A

*If the air temperature falls below 41°F (5°C) during the 4 hour dry time extend the dry times to 24 hours minimum. **COMPATIBILITY:** Micron CF is compatible with most other antifouling paints and can be applied after sanding the surface. Tin based copolymers should be removed or sealed with Primocon YPA984 or TBT Sealer YPA987.

PREPARATION

BARE FIBREGLASS: It is very important that bare fiberglass be properly prepared to remove the mold release wax completely to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following Interlux products. Fibreglass Surface Pre YMA601, Fibreglass Solvent Wash 202 or Low VOC Fibreglass Solvent Wash 202V following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed.

BARE FIBREGLASS – NO SAND SYSTEM Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. Apply one coat, using one of the following Interlux Products InterProtect®2000 or No Sand Primer YPA200, following the label instructions for applying the primer and overcoating with antifouling paint. **BARE FIBREGLASS – SANDING SYSTEM:** Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. After the surface has been cleaned sand with 80-grit sandpaper until a flat, matte finish has been obtained. Wipe off the sanding residue with Fiberglass Solvent Wash 202. **BARE WOOD:** Sand entire surface thoroughly to a smooth finish with 80-grit sandpaper. Clean off the sanding residue. Prime with Primocon thinned 10% with Special Thinner 216 or think first coat of Micron CF 10-15% with Special Thinner 216. Apply two more coats of this product unthinned, allowing appropriate dry times.

ALUMINIUM & UNDERWATER METALS: Please check datasheet for preparation to aluminium and underwater metals or contact Interlux Technical Service at 1-800-468-7589.

PREVIOUSLY PAINTED SURFACES: In Good Condition. Remove all contamination. Sand the entire surface with 80-grit sandpaper; remove sanding residue. In Poor Condition: Remove all previous coatings using Interstrip 299E and proceed with the system for the bare substrate.

APPLICATION

After the surface has been properly prepared and cleaned as above, apply two coats of Micron CF (3 on bare wood) by brush or roller (Residential users). Commercial (non-residential) users may apply Micron CF by airless spray while wearing the proper personal protective equipment.

NOTE: Important: Do not apply Micron CF above the true waterline.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN DANGER

Corrosive. Causes irreversible eye damage or skin burns. Harmful if absorbed through skin. Do not get in eyes, on skin or on clothing. Harmful if swallowed and inhaled. Do not breathe dust, vapour or spray mist. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long sleeved shirt and long pants, sock and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifouling paint, commercial users must wear a respirator with an organic vapour removing cartridge with a prefilter approved for pesticides (MSHA/NOISH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NOISH approval number TC-14) or a NOISH approved full face respirator with an organic vapour removing cartridge with a P100 prefilter. Residential (non-commercial) users are advised to wear the same respirators, cartridges, and prefilters as required by commercial users.

FIRST AID

IN THE EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, and then continue rinsing. Call a Poison Control Centre or doctor for treatment advice.

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move a person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a poison control center or doctor for further treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish, aquatic invertebrates, oysters, and shrimp. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

FLAMMABLE: Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE STORAGE: Store in a cool, dry place.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a max tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 200712

 'Micron®', 'Interlux®' and 'InterProtect®' are registered trademarks of Akzo Nobel.

 **Interlux.**

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Micron[®]CF

Copper Free Antifouling



yachtpaint.com

**KEEP OUT OF REACH OF CHILDREN
DANGER**

See Side Panel for Additional Precautionary Statements

**NET CONTENTS
ONE U.S. GALLON (3.785 L)**

**YBC103
BLACK**



AkzoNobel

ACTIVE INGREDIENTS

1H-PYRROLE-3-CARBONITRILE,	3.90%
4-BROMO-2-(4-CHLOROPHENYL)-	
5-(TRIFLUOROMETHYL)	
ZINC 2-PYRIDINETHIOL 1-OXIDE*	4.12%
INERT INGREDIENTS	91.98%
	100.00%

CONTAINS PETROLEUM DISTILLATES
*ZINC PYRITHIONE

EPA EST NO. 2693-NJ-1
EPA REG NO. 2693-230

MICRON® CF

PRODUCT DESCRIPTION: Micron CF is a copper free antifouling that provides excellent protection from shell and weed fouling. It uses Biolux® technology to block slime and Ectonea to ward off barnacles and zebra mussels. The fast dry formula of Micron CF allows the boat to be painted and launched quickly and its ablative action reduces paint build up and helps to improve fuel efficiency. Micron CF is available in bright colors and is suitable for use on all boats including fibreglass, aluminium, wood ad steel and can be used in wall waters. Micron CF can be brush or roller applied.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labelling. **GENERAL APPLICATION PROCEDURES:** For applications by residential (non-commercial) users: Do not apply by airless spray. Do not apply more than one coat of this product within 24 hours. Apply only in outdoor, non-enclosed spaces. Apply at least 2-3 full coats of Micron CF by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline and the bow stern polish faster than other areas. On these areas we suggest an additional coat of paint to insure that the Micron CF does not polish away before other areas of the bottom.

Approximate time it will take to paint your boat.

Boat Size / Application Time ;

14' 40 Minutes per coat; 20' 1 Hour 20 Minutes per coat; 30' 2 Hour 40 Minutes per coat

V.O.C: Less than 330 grams/liter (2.75 lbs./gallon)

THEORETICAL COVERAGE: 528 ft²/gal (2 mils dry film thickness).

THINNER: Special Thinner 216

THINNING: Do not exceed 10% by volume.

DRY TIMES

Temperature Temperatura °F (°C)	Touch Dry / Secado al Tacto	Overcoating Time/ Tiempo de Exposición Entre Capas		Immersion Time / Tiempo de Inmersión	
		Min	Max	Min	Max
41°F (5°C)	6 Hours/Horas	12 Hours/Horas	N/A	18 Hours/Horas	N/A
50°F (10°C)	3 Hours/Horas	6 Hours/Horas	N/A	9 Hours/Horas	N/A
73°F (23°C)	2 Hours/Horas	4 Hours/Horas	N/A	6 Hours/Horas	N/A
95°F (35°C)	1 Hours/Horas	2 Hours/Horas	N/A	4 Hours/Horas	N/A

*If the air temperature falls below 41°F (5°C) during the 4 hour dry time extend the dry times to 24 hours minimum. **COMPATIBILITY:** Micron CF is compatible with most other antifouling paints and can be applied after sanding the surface. Tin based copolymers should be removed or sealed with Primocon YPA984 or TBT Sealer YPA987.

PREPARATION

BARE FIBREGLASS: It is very important that bare fibreglass be properly prepared to remove the mold release wax completely to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following Interlux products. Fibreglass Surface Pre YMA601, Fibreglass Solvent Wash 202 or Low VOC Fibreglass Solvent Wash 202V following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed.

BARE FIBREGLASS – NO SAND SYSTEM: Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. Apply one coat, using one of the following Interlux Products InterProtect®2000 or No Sand Primer YPA200, following the label instructions for applying the primer and overcoating with antifouling paint. **BARE FIBREGLASS – SANDING SYSTEM:** Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. After the surface has been cleaned sand with 80-grit sandpaper until a flat, matte finish has been obtained. Wipe off the sanding residue with Fiberglass Solvent Wash 202. **BARE WOOD:** Sand entire surface thoroughly to a smooth finish with 80-grit sandpaper. Clean off the sanding residue. Prime with Primocon thinned 10% with Special Thinner 216 or think first coat of Micron CF 10-15% with Special Thinner 216. Apply two more coats of this product unthinned, allowing appropriate dry times.

ALUMINIUM & UNDERWATER METALS: Please check datasheet for preparation to aluminium and underwater metals or contact Interlux Technical Service at 1-800-468-7589.

PREVIOUSLY PAINTED SURFACES: In Good Condition. Remove all contamination. Sand the entire surface with 80-grit sandpaper; remove sanding residue. In Poor Condition: Remove all previous coatings using Interstrip 299E and proceed with the system for the bare substrate.

APPLICATION

After the surface has been properly prepared and cleaned as above, apply two coats of Micron CF (3 on bare wood) by brush or roller (Residential users). Commercial (non-residential) users may apply Micron CF by airless spray while wearing the proper personal protective equipment.

NOTE: Important: Do not apply Micron CF above the true waterline.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN DANGER

Corrosive. Causes irreversible eye damage or skin burns. Harmful if absorbed through skin. Do not get in eyes, on skin or on clothing. Harmful if swallowed and inhaled. Do not breathe dust, vapour or spray mist. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long sleeved shirt and long pants, sock and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifouling paint, commercial users must wear a respirator with an organic vapour removing cartridge with a prefilter approved for pesticides (MSHA/NOISH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NOISH approval number TC-14) or a NOISH approved full face respirator with an organic vapour removing cartridge with a P100 prefilter. Residential (non-commercial) users are advised to wear the same respirators, cartridges, and prefilters as required by commercial users.

FIRST AID

IN THE EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, and then continue rinsing. Call a Poison Control Centre or doctor for treatment advice.

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move a person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a poison control center or doctor for further treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish, aquatic invertebrates, oysters, and shrimp. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

FLAMMABLE: Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE STORAGE: Store in a cool, dry place.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a max tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 200712

✕ 'Micronz', 'Interlux®' and 'InterProtect®' are registered trademarks of Akzo Nobel.


Interlux.

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Micron[®]CF

Copper Free Antifouling

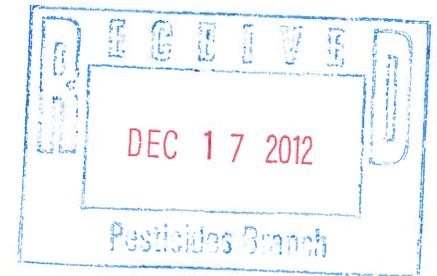

yachtpaint.com

KEEP OUT OF REACH OF CHILDREN

DANGER

See Side Panel for Additional Precautionary Statements

NET CONTENTS
ONE U.S. GALLON (3.785 L)

YBC102
RED



AkzoNobel

ACTIVE INGREDIENTS

1H-PYRROLE-3-CARBONITRILE, 4-BROMO-2-(4-CHLOROPHENYL) -5-(TRIFLUOROMETHYL)	3.90%
ZINC 2-PYRIDINETHIOL 1-OXIDE*	4.12%
INERT INGREDIENTS	91.98%
	100.00%

CONTAINS PETROLEUM DISTILLATES
*ZINC PYRITHIONE

EPA EST NO. 2693-NJ-1
EPA REG NO. 2693-230

MICRON® CF

PRODUCT DESCRIPTION: Micron CF is a copper free antifouling that provides excellent protection from shell and weed fouling. It uses Biolux® technology to block slime and Ectoparasites to ward off barnacles and zebra mussels. The fast dry formula of Micron CF allows the boat to be painted and launched quickly and its ablatative action reduces paint build up and helps to improve fuel efficiency. Micron CF is available in bright colors and is suitable for use on all boats including fiberglass, aluminium, wood ad steel and can be used in wall waters. Micron CF can be brush or roller applied.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labelling. **GENERAL APPLICATION PROCEDURES:** For applications by residential (non-commercial) users: Do not apply by airless spray. Do not apply more than one coat of this product within 24 hours. Apply only in outdoor, non-enclosed spaces. Apply at least 2-3 full coats of Micron CF by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline and the bow stern polish faster than other areas. On these areas we suggest an additional coat of paint to insure that the Micron CF does not polish away before other areas of the bottom.

Approximate time it will take to paint your boat.

Boat Size / Application Time ;

14' 40 Minutes per coat; 20' 1 Hour 20 Minutes per coat; 30' 2 Hour 40 Minutes per coat

V.O.C: Less than 330 grams/liter (2.75 lbs./gallon)

THEORETICAL COVERAGE: 528 ft²/gal (2 mils dry film thickness).

THINNER: Special Thinner 216

THINNING: Do not exceed 10% by volume.

DRY TIMES

Temperature Temperatura °F (°C)	Touch Dry / Secado al Tacto	Overcoating Time/ Tiempo de Exposición Entre Capas		Immersion Time / Tiempo de Inmersión	
		Min	Max	Min	Max
41°F (5°C)	6 Hours/Horas	12 Hours/Horas	N/A	18 Hours/Horas	N/A
50°F (10°C)	3 Hours/Horas	6 Hours/Horas	N/A	9 Hours/Horas	N/A
73°F (23°C)	2 Hours/Horas	4 Hours/Horas	N/A	6 Hours/Horas	N/A
95°F (35°C)	1 Hours/Horas	2 Hours/Horas	N/A	4 Hours/Horas	N/A

*If the air temperature falls below 41°F (5°C) during the 4 hour dry time extend the dry times to 24 hours minimum. **COMPATABILITY:** Micron CF is compatible with most other antifouling paints and can be applied after sanding the surface. Tin based copolymers should be removed or sealed with Primocon YPA984 or TBT Sealer YPA987.

PREPARATION

BARE FIBREGLASS: It is very important that bare fiberglass be properly prepared to remove the mold release wax completely to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following Interlux products. Fibreglass Surface Pre YMA601, Fibreglass Solvent Wash 202 or Low VOC Fibreglass Solvent Wash 202V following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed.

BARE FIBREGLASS – NO SAND SYSTEM Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. Apply one coat, using one of the following Interlux Products InterProtect®2000 or No Sand Primer YPA200, following the label instructions for applying the primer and overcoating with antifouling paint. **BARE FIBREGLASS – SANDING SYSTEM:** Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. After the surface has been cleaned sand with 80-grit sandpaper until a flat, matte finish has been obtained. Wipe off the sanding residue with Fiberglass Solvent Wash 202. **BARE WOOD:** Sand entire surface thoroughly to a smooth finish with 80-grit sandpaper. Clean off the sanding residue. Prime with Primocon thinned 10% with Special Thinner 216 or think first coat of Micron CF 10-15% with Special Thinner 216. Apply two more coats of this product unthinned, allowing appropriate dry times.

ALUMINIUM & UNDERWATER METALS: Please check datasheet for preparation to aluminium and underwater metals or contact Interlux Technical Service at 1-800-468-7589.

PREVIOUSLY PAINTED SURFACES: In Good Condition. Remove all contamination. Sand the entire surface with 80-grit sandpaper; remove sanding residue. In Poor Condition: Remove all previous coatings using Interstrip 299E and proceed with the system for the bare substrate.

APPLICATION

After the surface has been properly prepared and cleaned as above, apply two coats of Micron CF (3 on bare wood) by brush or roller (Residential users). Commercial (non-residential) users may apply Micron CF by airless spray while wearing the proper personal protective equipment.

NOTE: Important: Do not apply Micron CF above the true waterline.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN DANGER

Corrosive. Causes irreversible eye damage or skin burns. Harmful if absorbed through skin. Do not get in eyes, on skin or on clothing. Harmful if swallowed and inhaled. Do not breathe dust, vapour or spray mist. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long sleeved shirt and long pants, sock and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifoulant paint, commercial users must wear a respirator with an organic vapour removing cartridge with a prefilter approved for pesticides (MSHA/NOISH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NOISH approval number TC-14) or a NOISH approved full face respirator with an organic vapour removing cartridge with a P100 prefilter. Residential (non-commercial) users are advised to wear the same respirators, cartridges, and prefilters as required by commercial users.

FIRST AID

IN THE EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, and then continue rinsing. Call a Poison Control Centre or doctor for treatment advice.

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move a person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a poison control center or doctor for further treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish, aquatic invertebrates, oysters, and shrimp. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

FLAMMABLE: Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE STORAGE: Store in a cool, dry place.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a max tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 200712

✕ Micron®, Interlux® and InterProtect® are registered trademarks of Akzo Nobel.

Interlux.

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Micron[®]CF

Copper Free Antifouling



yachtpaint.com

**KEEP OUT OF REACH OF CHILDREN
DANGER**

See Side Panel for Additional Precautionary Statements

**NET CONTENTS
ONE U.S. GALLON (3.785 L)**

**YBC101
GREEN**



AkzoNobel

ACTIVE INGREDIENTS

1H-PYRROLE-3-CARBONITRILE, 4-BROMO-2-(4-CHLOROPHENYL) -5-(TRIFLUOROMETHYL)	3.90%
ZINC 2-PYRIDINETHIOL 1-OXIDE*	4.12%
INERT INGREDIENTS	91.98%
	100.00%

CONTAINS PETROLEUM DISTILLATES
*ZINC PYRITHIONE

EPA EST NO. 2693-NJ-1
EPA REG NO. 2693-230

MICRON® CF

PRODUCT DESCRIPTION: Micron CF is a copper free antifouling that provides excellent protection from shell and weed fouling. It uses Biolux® technology to block slime and Econeal to ward off barnacles and zebra mussels. The fast dry formula of Micron CF allows the boat to be painted and launched quickly and its ablatative action reduces paint build up and helps to improve fuel efficiency. Micron CF is available in bright colors and is suitable for use on all boats including fibreglass, aluminium, wood ad steel and can be used in wall waters. Micron CF can be brush or roller applied.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labelling. **GENERAL APPLICATION PROCEDURES:** For applications by residential (non-commercial) users: Do not apply by airless spray. Do not apply more than one coat of this product within 24 hours. Apply only in outdoor, non-enclosed spaces. Apply at least 2-3 full coats of Micron CF by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline and the bow stern polish faster than other areas. On these areas we suggest an additional coat of paint to insure that the Micron CF does not polish away before other areas of the bottom.

Approximate time it will take to paint your boat.

Boat Size / Application Time ;

14' 40 Minutes per coat; 20' 1 Hour 20 Minutes per coat; 30' 2 Hour 40 Minutes per coat

V.O.C: Less than 330 grams/liter (2.75 lbs./gallon)

THEORETICAL COVERAGE: 528 ft²/gal (2 mils dry film thickness).

THINNER: Special Thinner 216

THINNING: Do not exceed 10% by volume.

DRY TIMES

Temperature Temperatura °F (°C)	Touch Dry / Secado al Tacto		Overcoating Time/ Tiempo de Exposición Entre Capas		Immersion Time / Tiempo de Inmersión	
	Min	Max	Min	Max	Min	Max
41°F (5°C)	6 Hours/Horas	N/A	12 Hours/Horas	N/A	18 Hours/Horas	N/A
50°F (10°C)	3 Hours/Horas	N/A	6 Hours/Horas	N/A	9 Hours/Horas	N/A
73°F (23°C)	2 Hours/Horas	N/A	4 Hours/Horas	N/A	6 Hours/Horas	N/A
95°F (35°C)	1 Hours/Horas	N/A	2 Hours/Horas	N/A	4 Hours/Horas	N/A

*If the air temperature falls below 41°F (5°C) during the 4 hour dry time extend the dry times to 24 hours minimum. **COMPATIBILITY:** Micron CF is compatible with most other antifouling paints and can be applied after sanding the surface. Tin based copolymers should be removed or sealed with Primocon YPA984 or TBT Sealer YPA987.

PREPARATION

BARE FIBREGLASS: It is very important that bare fibreglass be properly prepared to remove the mold release wax completely to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following Interlux products. Fibreglass Surface Pre YMA601, Fibreglass Solvent Wash 202 or Low VOC Fibreglass Solvent Wash 202V following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed.

BARE FIBREGLASS – NO SAND SYSTEM Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. Apply one coat, using one of the following Interlux Products InterProtect®2000 or No Sand Primer YPA200, following the label instructions for applying the primer and overcoating with antifouling paint. **BARE FIBREGLASS – SANDING SYSTEM:** Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. After the surface has been cleaned sand with 80-grit sandpaper until a flat, matte finish has been obtained. Wipe off the sanding residue with Fiberglass Solvent Wash 202. **BARE WOOD:** Sand entire surface thoroughly to a smooth finish with 80-grit sandpaper. Clean off the sanding residue. Prime with Primocon thinned 10% with Special Thinner 216 or think first coat of Micron CF 10-15% with Special Thinner 216. Apply two more coats of this product unthinned, allowing appropriate dry times.

ALUMINIUM & UNDERWATER METALS: Please check datasheet for preparation to aluminium and underwater metals or contact Interlux Technical Service at 1-800-468-7589.

PREVIOUSLY PAINTED SURFACES: In Good Condition. Remove all contamination. Sand the entire surface with 80-grit sandpaper; remove sanding residue. In Poor Condition: Remove all previous coatings using Interstrip 299E and proceed with the system for the bare substrate.

APPLICATION

After the surface has been properly prepared and cleaned as above, apply two coats of Micron CF (3 on bare wood) by brush or roller (Residential users). Commercial (non-residential) users may apply Micron CF by airless spray while wearing the proper personal protective equipment.

NOTE: Important: Do not apply Micron CF above the true waterline.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN DANGER

Corrosive. Causes irreversible eye damage or skin burns. Harmful if absorbed through skin. Do not get in eyes, on skin or on clothing. Harmful if swallowed and inhaled. Do not breathe dust, vapour or spray mist. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long sleeved shirt and long pants, sock and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifouling paint, commercial users must wear a respirator with an organic vapour removing cartridge with a prefilter approved for pesticides (MSHA/NOISH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NOISH approval number TC-14) or a NOISH approved full face respirator with an organic vapour removing cartridge with a P100 prefilter. Residential (non-commercial) users are advised to wear the same respirators, cartridges, and prefilters as required by commercial users.

FIRST AID

IN THE EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, and then continue rinsing. Call a Poison Control Centre or doctor for treatment advice.

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move a person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a poison control center or doctor for further treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish, aquatic invertebrates, oysters, and shrimp. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

FLAMMABLE: Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE STORAGE: Store in a cool, dry place.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a max tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 200712

✕ 'Microne', 'Interlux®' and 'InterProtect®' are registered trademarks of Akzo Nobel.

Interlux.


International Paint LLC.

2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Micron[®]CF

Copper Free Antifouling

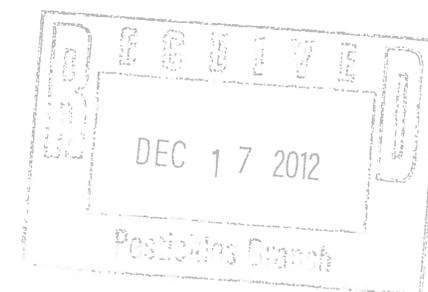

yachtpaint.com

**KEEP OUT OF REACH OF CHILDREN
DANGER**

See Side Panel for Additional Precautionary Statements

**NET CONTENTS
ONE U.S. GALLON (3.785 L)**

**YBC104
SHELL WHITE**



AkzoNobel

ACTIVE INGREDIENTS

1H-PYRROLE-3-CARBONITRILE, 4-BROMO-2-(4-CHLOROPHENYL) -5-(TRIFLUOROMETHYL)	3.90%
ZINC 2-PYRIDINETHIOL 1-OXIDE*	4.12%
INERT INGREDIENTS	91.98%
	100.00%

CONTAINS PETROLEUM DISTILLATES
*ZINC PYRITHIONE

EPA EST NO. 2693-NJ-1
EPA REG NO. 2693-230

MICRON® CF

PRODUCT DESCRIPTION: Micron CF is a copper free antifouling that provides excellent protection from shell and weed fouling. It uses Biolux® technology to block slime and Ectonea to ward off barnacles and zebra mussels. The fast dry formula of Micron CF allows the boat to be painted and launched quickly and its ablatative action reduces paint build up and helps to improve fuel efficiency. Micron CF is available in bright colors and is suitable for use on all boats including fibreglass, aluminium, wood ad steel and can be used in wall waters. Micron CF can be brush or roller applied.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labelling. **GENERAL APPLICATION PROCEDURES:** For applications by residential (non-commercial) users: Do not apply by airless spray. Do not apply more than one coat of this product within 24 hours. Apply only in outdoor, non-enclosed spaces. Apply at least 2-3 full coats of Micron CF by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline and the bow stern polish faster than other areas. On these areas we suggest an additional coat of paint to insure that the Micron CF does not polish away before other areas of the bottom.

Approximate time it will take to paint your boat.

Boat Size / Application Time ;

14' 40 Minutes per coat; 20' 1 Hour 20 Minutes per coat; 30' 2 Hour 40 Minutes per coat

V.O.C: Less than 330 grams/liter (2.75 lbs./gallon)

THEORETICAL COVERAGE: 528 ft²/gal (2 mils dry film thickness).

THINNER: Special Thinner 216

THINNING: Do not exceed 10% by volume.

DRY TIMES

Temperature Temperatura °F (°C)	Touch Dry / Secado al Tacto	Overcoating Time/ Tiempo de Exposición Entre Capas		Immersion Time / Tiempo de Inmersión	
		Min	Max	Min	Max
41°F (5°C)	6 Hours/Horas	12 Hours/Horas	N/A	18 Hours/Horas	N/A
50°F (10°C)	3 Hours/Horas	6 Hours/Horas	N/A	9 Hours/Horas	N/A
73°F (23°C)	2 Hours/Horas	4 Hours/Horas	N/A	6 Hours/Horas	N/A
95°F (35°C)	1 Hours/Horas	2 Hours/Horas	N/A	4 Hours/Horas	N/A

*If the air temperature falls below 41°F (5°C) during the 4 hour dry time extend the dry times to 24 hours minimum. **COMPATABILITY:** Micron CF is compatible with most other antifouling paints and can be applied after sanding the surface. Tin based copolymers should be removed or sealed with Primocon YPA984 or TBT Sealer YPA987.

PREPARATION

BARE FIBREGLASS: It is very important that bare fibreglass be properly prepared to remove the mold release wax completely to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following Interlux products. Fibreglass Surface Pre YMA601, Fibreglass Solvent Wash 202 or Low VOC Fibreglass Solvent Wash 202V following the product label instructions. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, clean again. When the water sheets off, all contamination has been removed.

BARE FIBREGLASS – NO SAND SYSTEM Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. Apply one coat, using one of the following Interlux Products InterProtect®2000 or No Sand Primer YPA200, following the label instructions for applying the primer and overcoating with antifouling paint. **BARE FIBREGLASS – SANDING SYSTEM:** Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux Watertite filler. Sand and wipe clean. After the surface has been cleaned sand with 80-grit sandpaper until a flat, matte finish has been obtained. Wipe off the sanding residue with Fiberglass Solvent Wash 202. **BARE WOOD:** Sand entire surface thoroughly to a smooth finish with 80-grit sandpaper. Clean off the sanding residue. Prime with Primocon thinned 10% with Special Thinner 216 or think first coat of Micron CF 10-15% with Special Thinner 216. Apply two more coats of this product unthinned, allowing appropriate dry times.

ALUMINIUM & UNDERWATER METALS: Please check datasheet for preparation to aluminium and underwater metals or contact Interlux Technical Service at 1-800-468-7589.

PREVIOUSLY PAINTED SURFACES: In Good Condition. Remove all contamination. Sand the entire surface with 80-grit sandpaper; remove sanding residue. In Poor Condition: Remove all previous coatings using Interstrip 299E and proceed with the system for the bare substrate.

APPLICATION

After the surface has been properly prepared and cleaned as above, apply two coats of Micron CF (3 on bare wood) by brush or roller (Residential users). Commercial (non-residential) users may apply Micron CF by airless spray while wearing the proper personal protective equipment.

NOTE: Important: Do not apply Micron CF above the true waterline.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN

DANGER

Corrosive. Causes irreversible eye damage or skin burns. Harmful if absorbed through skin. Do not get in eyes, on skin or on clothing. Harmful if swallowed and inhaled. Do not breathe dust, vapour or spray mist. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long sleeved shirt and long pants, sock and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifouling paint, commercial users must wear a respirator with an organic vapour removing cartridge with a prefilter approved for pesticides (MSHA/NOISH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NOISH approval number TC-14) or a NOISH approved full face respirator with an organic vapour removing cartridge with a P100 prefilter. Residential (non-commercial) users are advised to wear the same respirators, cartridges, and prefilters as required by commercial users.

FIRST AID

IN THE EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, and then continue rinsing. Call a Poison Control Centre or doctor for treatment advice.

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move a person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a poison control center or doctor for further treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This material is toxic to fish, aquatic invertebrates, oysters, and shrimp. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

FLAMMABLE: Keep away from heat and open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE STORAGE: Store in a cool, dry place.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a max tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 200712

✳️ Microns®, Interlux® and InterProtect® are registered trademarks of Akzo Nobel.

Interlux.

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300