




LICENSED

PERIOD 2015-2017 LIC. NO.

9669.201

AkzoNobel

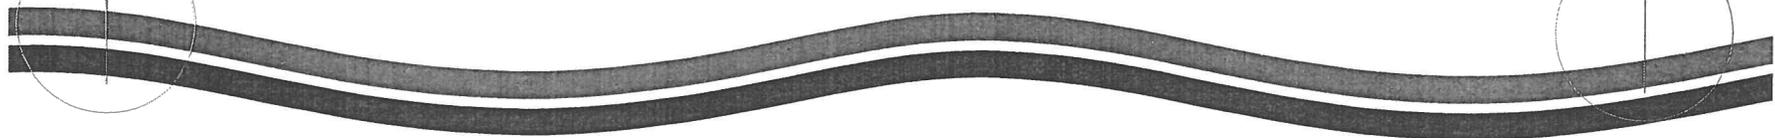

ACT

Eliminates Paint Build Up and Heavy Sanding
Season Long Protection for Moderate to Heavy Fouling
Overcoats Existing Antifouling Paint

KEEP OUT OF REACH OF CHILDREN
WARNING

See Side Panel for Additional Precautionary Statements

4490U
RED

ONE U.S. GALLON
(3.785 L)

| | |
|--------------------|---------|
| ACTIVE INGREDIENT | |
| CUPROUS OXIDE | 41.97% |
| INERT INGREDIENTS | 58.03% |
| | 100.00% |
| COPPER AS METALLIC | 37.11% |

EPA ESTABLISHMENT NO. 2693-TX-1
EPA REGISTRATION NO. 2693-142
Contains petroleum distillates

yachtpaint.com

DISCLAIMER: The performance of any marine coating depends on many factors, outside the control of Interlux Paint LLC including the surface preparation, correct application, and the environmental conditions. Therefore, Interlux Paint LLC cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL ANNE T. CECILIA, INTERLUX PAINT LLC, 1001 KALANANUOHI DRIVE, HONOLULU, HI 96813. © 2015 INTERLUX PAINT LLC. ALL RIGHTS RESERVED. THIS LABEL IS THE PROPERTY OF INTERLUX PAINT LLC. ANY REPRODUCTION OR TRANSMISSION OF THIS LABEL IS PROHIBITED. BY PURCHASE OR USE OF THIS PRODUCT, BUYER AGREES THAT THE SALE AND EXCLUSIVE REMOVAL, IF ANY, IS LIMITED TO THE RETAILER OF THE PURCHASE PRICE OR REPLACEMENT OF THE PRODUCT AT INTERLUX PAINT LLC'S OPTION.

ACT

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: This product uses Ablative Copolymer Technology to enable it to wash away with use, constantly exposing fresh and effective biocide. This Ablative Copolymer Technology also eliminates the build-up of old spent coatings and the heavy sanding needed to remove them. This product provides season long protection against algae, barnacles and other forms of marine fouling in waters with moderate to heavy fouling. For use in fresh, salt and brackish waters.

COMPATIBILITY: This product can be applied over existing antifouling as long as the old coating is tightly adhered and is in sound condition. When applying over conventional antifouling paints, thoroughly sand with 80 grit wet-or-dry sandpaper. Soft rosin based coatings should be removed prior to application of this product.

V.O.C.: Less than 370 grams / liter **COATS REQUIRED:** 2 coats, 3 coats on bare wood

THINNER: INTERLUX® BRUSH EASE 433 **DRY TIMES:** Touch dry 2 hours

CLEAN UP: INTERLUX® BRUSH EASE 433 77°F (25°C). To Recoat – 16 hours

THEORETICAL COVERAGE: 455sq.ft./gal/coat To Launch – minimum 16 hours.
Maximum 60 days

APPLICATION TEMPERATURE: 50°F (10°C) and above

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES – GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit sandpaper; wipe surface clean with Interlux Special Thinner 216. Stir thoroughly. Touch up bare areas. Apply two full coats of this product by brush of 3/8" nap roller. Do not apply thin coats. If during application, the brush or roller drags, thin with INTERLUX® BRUSH EASE 433 to improve handling. See compatibility section for additional information.

PREVIOUSLY PAINTED SURFACES – POOR CONDITION: Completely remove all old antifouling paint with INTERLUX® FIBERGLASS PINTOFF® 299 for fiberglass and epoxy surfaces, INTERLUX® PINTOFF® 199 for wood and by sandblasting underwater metals to near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS – (POLYESTER or VINYLESTER)

SURFACE PREPARATION: Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202 changing rags frequently. Before liquid dries, wipe with clean dry cloth. Be sure all wax and other contamination is removed, failure to properly clean the surface will result in paint delamination. Sand any imperfections and repair with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Sanding does not remove surface contamination.

BARE FIBERGLASS – NO SAND SYSTEM: After the surface has been prepared as described above – apply one thin continuous coat of INTERLUX® AL200 FIBERGLASS PRIMER® with brush or roller. Follow label directions for overcoating. Apply two coats of this product.

BARE FIBERGLASS – SANDING SYSTEM: After the surface has been prepared as described above – sand entire surface well with 80 grit sandpaper until a flat, matte finish is obtained; wipe off sanding residue with INTERLUX® FIBERGLASS SOLVENT WASH 202 (TM). Apply two coats of this product.

BARE WOOD: Remove any surface contamination by wiping with INTERLUX® SPECIAL THINNER 216. Sand entire surface with 80 grit sandpaper. Wipe off sanding residue with INTERLUX® SPECIAL THINNER 216. Repair any imperfections with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of this product reduced with INTERLUX® BRUSH EASE 433 (10% maximum). Apply two additional coats unreduced. Allow a minimum of 16 hours between coats. Fill seams (if necessary) with INTERLUX® SEAM COMPOUND 30 between first and second coats of antifouling paint.

UNDERWATER METALS: Contact the INTERLUX® Technical Service Department at 1-800-468-7589 for full details on how to properly primer underwater metals. Do not use on aluminum.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If swallowed:

- Immediately call a poison control center or doctor
- Do not induce vomiting unless told to do so by a poison control center or doctor
- Do not give any liquid to the person
- Do not give anything by mouth to an unconscious person

If on skin or clothing:

- Take off contaminated clothing
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice

If inhaled:

- Move person to fresh air
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible
- Call a poison control center or doctor for further treatment advice

If in eye:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat, sparks or open flames

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticides, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store for rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 230611

 Interlux and the AkzoNobel logo are trademarks of Akzo Nobel.

 **Interlux.**

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Department of Agriculture
STATE OF HAWAII

LICENSED

PERIOD 2015-2017 LIC. NO. 9669.201

AlkoNobel



ACT

Eliminates Paint Build Up and Heavy Sanding
Season Long Protection for Moderate to Heavy Fouling
Overcoats Existing Antifouling Paint

**KEEP OUT OF REACH OF CHILDREN
WARNING**

See Side Panel for Additional Precautionary Statements

5590U
GREEN

ONE U.S. GALLON
(3.785 L)

| | |
|--------------------|---------|
| ACTIVE INGREDIENT | |
| CUPROUS OXIDE | 41.97% |
| INERT INGREDIENTS | 58.03% |
| COPPER AS METALLIC | 100.00% |
| | 37.11% |

EPA ESTABLISHMENT NO. 2693-TX-1
EPA REGISTRATION NO. 2693-142
Contains petroleum distillates

yachtpaint.com

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of International Paint LLC including the surface preparation, proper application and the environmental conditions. Therefore, International Paint LLC cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT LLC SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of this product, buyer agrees that his sale and exclusive remedy is cash, is limited to the volume of the purchase price or replacement of the product at International Paint LLC's option.

ACT

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: This product uses Ablative Copolymer Technology to enable it to wash away with use, constantly exposing fresh and effective biocide. This Ablative Copolymer Technology also eliminates the build-up of old spent coatings and the heavy sanding needed to remove them. This product provides season long protection against algae, barnacles and other forms of marine fouling in waters with moderate to heavy fouling. For use in fresh, salt and brackish waters.

COMPATIBILITY: This product can be applied over existing antifouling as long as the old coating is tightly adhered and is in sound condition. When applying over conventional antifouling paints, thoroughly sand with 80 grit wet-or-dry sandpaper. Soft rosin based coatings should be removed prior to application of this product.

V.O.C.: Less than 370 grams / liter **COATS REQUIRED:** 2 coats. 3 coats on bare wood

THINNER: INTERLUX® BRUSH EASE 433 **DRY TIMES:** Touch dry 2 hours

CLEAN UP: INTERLUX® BRUSH EASE 433 77°F (25°C). To Recoat – 16 hours

THEORETICAL COVERAGE: 455sq.ft./gal/coat To Launch – minimum 16 hours.
Maximum 60 days

APPLICATION TEMPERATURE: 50°F (10°C) and above

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES – GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit sandpaper; wipe surface clean with Interlux Special Thinner 216. Stir thoroughly. Touch up bare areas. Apply two full coats of this product by brush of 3/8" nap roller. Do not apply thin coats. If during application, the brush or roller drags, thin with INTERLUX® BRUSH EASE 433 to improve handling. See compatibility section for additional information.

PREVIOUSLY PAINTED SURFACES – POOR CONDITION: Completely remove all old antifouling paint with INTERLUX® FIBERGLASS PINTOFF® 299 for fiberglass and epoxy surfaces, INTERLUX® PINTOFF® 199 for wood and by sandblasting underwater metals to near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS – (POLYESTER or VINYLESTER)

SURFACE PREPARATION: Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202 changing rags frequently. Before liquid dries, wipe with clean dry cloth. Be sure all wax and other contamination is removed, failure to properly clean the surface will result in paint delamination. Sand any imperfections and repair with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Sanding does not remove surface contamination.

BARE FIBERGLASS – NO SAND SYSTEM: After the surface has been prepared as described above – apply one thin continuous coat of INTERLUX® AL200 FIBERGLASS PRIMER® with brush or roller. Follow label directions for overcoating. Apply two coats of this product.

BARE FIBERGLASS – SANDING SYSTEM: After the surface has been prepared as described above – sand entire surface well with 80 grit sandpaper until a flat, matte finish is obtained; wipe off sanding residue with INTERLUX® FIBERGLASS SOLVENT WASH 202 (TM). Apply two coats of this product.

BARE WOOD: Remove any surface contamination by wiping with INTERLUX® SPECIAL THINNER 216. Sand entire surface with 80 grit sandpaper. Wipe off sanding residue with INTERLUX® SPECIAL THINNER 216. Repair any imperfections with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of this product reduced with INTERLUX® BRUSH EASE 433 (10% maximum). Apply two additional coats unreduced. Allow a minimum of 16 hours between coats. Fill seams (if necessary) with INTERLUX® SEAM COMPOUND 30 between first and second coats of antifouling paint.

UNDERWATER METALS: Contact the INTERLUX® Technical Service Department at 1-800-468-7589 for full details on how to properly primer underwater metals. Do not use on aluminum.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If swallowed:

- Immediately call a poison control center or doctor
- Do not induce vomiting unless told to do so by a poison control center or doctor
- Do not give any liquid to the person
- Do not give anything by mouth to an unconscious person

If on skin or clothing:

- Take off contaminated clothing
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice

If inhaled:

- Move person to fresh air
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible
- Call a poison control center or doctor for further treatment advice

If in eye:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat, sparks or open flames

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticides, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store for rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 230611



Interlux and the AkzoNobel logo are trademarks of Akzo Nobel.

Interlux.

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Department of Agriculture
STATE OF HAWAII

LICENSED

PERIOD 2015-2017 LIC. NO.

9669.201

AkzoNobel



ACT

Eliminates Paint Build Up and Heavy Sanding
Season Long Protection for Moderate to Heavy Fouling
Overcoats Existing Antifouling Paint

**KEEP OUT OF REACH OF CHILDREN
WARNING**

See Side Panel for Additional Precautionary Statements

**ONE U.S. GALLON
(3.785 L)**

**6690U
BLUE**

| | |
|--------------------------|---------|
| ACTIVE INGREDIENT | |
| CUPROUS OXIDE | 41.97% |
| INERT INGREDIENTS | 58.03% |
| | 100.00% |
| COPPER AS METALLIC | 37.11% |

EPA ESTABLISHMENT NO. 2693-TX-1
EPA REGISTRATION NO. 2693-142
Contains petroleum distillates

yachtpaint.com

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of Interlux Paint, LLC, including the surface preparation, proper application and the environmental conditions. Therefore, Interlux Paint, LLC cannot be held responsible for any failure of the coating. Interlux Paint, LLC SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of the product, buyer agrees that the sale and purchase remedy, if any, is limited to the return of the purchase price or replacement of the product, at Interlux Paint, LLC's option.

ACT

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: This product uses Ablative Copolymer Technology to enable it to wash away with use, constantly exposing fresh and effective biocide. This Ablative Copolymer Technology also eliminates the build-up of old spent coatings and the heavy sanding needed to remove them. This product provides season long protection against algae, barnacles and other forms of marine fouling in waters with moderate to heavy fouling. For use in fresh, salt and brackish waters.

COMPATIBILITY: This product can be applied over existing antifouling as long as the old coating is tightly adhered and is in sound condition. When applying over conventional antifouling paints, thoroughly sand with 80 grit wet-or-dry sandpaper. Soft rosin based coatings should be removed prior to application of this product.

V.O.C.: Less than 370 grams / liter **COATS REQUIRED:** 2 coats. 3 coats on bare wood

THINNER: INTERLUX® BRUSH EASE 433 **DRY TIMES:** Touch dry 2 hours

CLEAN UP: INTERLUX® BRUSH EASE 433 77°F (25°C). To Recoat – 16 hours

THEORETICAL COVERAGE: 455sq.ft./gal/coat To Launch – minimum 16 hours.
Maximum 60 days

APPLICATION TEMPERATURE: 50°F (10°C) and above

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES – GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit sandpaper; wipe surface clean with Interlux Special Thinner 216. Stir thoroughly. Touch up bare areas. Apply two full coats of this product by brush of 3/8" nap roller. Do not apply thin coats. If during application, the brush or roller drags, thin with INTERLUX® BRUSH EASE 433 to improve handling. See compatibility section for additional information.

PREVIOUSLY PAINTED SURFACES – POOR CONDITION: Completely remove all old antifouling paint with INTERLUX® FIBERGLASS PINTOFF® 299 for fiberglass and epoxy surfaces, INTERLUX® PINTOFF® 199 for wood and by sandblasting underwater metals to near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS – (POLYESTER or VINYLESTER)

SURFACE PREPARATION: Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202 changing rags frequently. Before liquid dries, wipe with clean dry cloth. Be sure all wax and other contamination is removed, failure to properly clean the surface will result in paint delamination. Sand any imperfections and repair with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Sanding does not remove surface contamination.

BARE FIBERGLASS – NO SAND SYSTEM: After the surface has been prepared as described above – apply one thin continuous coat of INTERLUX® AL200 FIBERGLASS PRIMER® with brush or roller. Follow label directions for overcoating. Apply two coats of this product.

BARE FIBERGLASS – SANDING SYSTEM: After the surface has been prepared as described above – sand entire surface well with 80 grit sandpaper until a flat, matte finish is obtained; wipe off sanding residue with INTERLUX® FIBERGLASS SOLVENT WASH 202™. Apply two coats of this product.

BARE WOOD: Remove any surface contamination by wiping with INTERLUX® SPECIAL THINNER 216. Sand entire surface with 80 grit sandpaper. Wipe off sanding residue with INTERLUX® SPECIAL THINNER 216. Repair any imperfections with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of this product reduced with INTERLUX® BRUSH EASE 433 (10% maximum). Apply two additional coats unreduced. Allow a minimum of 16 hours between coats. Fill seams (if necessary) with INTERLUX® SEAM COMPOUND 30 between first and second coats of antifouling paint.

UNDERWATER METALS: Contact the INTERLUX® Technical Service Department at 1-800-468-7589 for full details on how to properly primer underwater metals. Do not use on aluminum.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If swallowed:

- Immediately call a poison control center or doctor
- Do not induce vomiting unless told to do so by a poison control center or doctor
- Do not give any liquid to the person
- Do not give anything by mouth to an unconscious person

If on skin or clothing:

- Take off contaminated clothing
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice

If inhaled:

- Move person to fresh air
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible
- Call a poison control center or doctor for further treatment advice

If in eye:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat, sparks or open flames

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticides, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store for rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 230611

 Interlux and the AkzoNobel logo are trademarks of Akzo Nobel.

Interlux.

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Department of Agriculture
STATE OF HAWAII

LICENSED

PERIOD **2015-2017** LIC. NO.

9669.201

AkzoNobel



ACT

**Eliminates Paint Build Up and Heavy Sanding
Season Long Protection for Moderate to Heavy Fouling
Overcoats Existing Antifouling Paint**

**KEEP OUT OF REACH OF CHILDREN
WARNING**

See Side Panel for Additional Precautionary Statements

**ONE U.S. GALLON
(3.785 L)**

**7790U
BLACK**

| | |
|--------------------------|---------|
| ACTIVE INGREDIENT | |
| CUPROUS OXIDE | 41.97% |
| INERT INGREDIENTS | 58.03% |
| COPPER AS METALLIC | 100.00% |
| | 37.11% |

EPA ESTABLISHMENT NO. 2693-TX-1
EPA REGISTRATION NO. 2693-142
Contains petroleum distillates

yachtpaint.com

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of International Paint LLC including the surface preparation, proper application and the environmental conditions. Therefore, International Paint LLC makes no warranty, expressed or implied, for a particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT LLC SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of the product, buyer agrees that the sale and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at International Paint LLC's option.

ACT

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: This product uses Ablative Copolymer Technology to enable it to wash away with use, constantly exposing fresh and effective biocide. This Ablative Copolymer Technology also eliminates the build-up of old spent coatings and the heavy sanding needed to remove them. This product provides season long protection against algae, barnacles and other forms of marine fouling in waters with moderate to heavy fouling. For use in fresh, salt and brackish waters.

COMPATIBILITY: This product can be applied over existing antifouling as long as the old coating is tightly adhered and is in sound condition. When applying over conventional antifouling paints, thoroughly sand with 80 grit wet-or-dry sandpaper. Soft rosin based coatings should be removed prior to application of this product.

V.O.C.: Less than 370 grams / liter **COATS REQUIRED:** 2 coats. 3 coats on bare wood

THINNER: INTERLUX® BRUSH EASE 433 **DRY TIMES:** Touch dry 2 hours
CLEAN UP: INTERLUX® BRUSH EASE 433 77°F (25°C). To Recoat – 16 hours

THEORETICAL COVERAGE: 455sq.ft/gal/coat To Launch – minimum 16 hours.
Maximum 60 days

APPLICATION TEMPERATURE: 50°F (10°C) and above

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES – GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit sandpaper; wipe surface clean with Interlux Special Thinner 216. Stir thoroughly. Touch up bare areas. Apply two full coats of this product by brush of 3/8" nap roller. Do not apply thin coats. If during application, the brush or roller drags, thin with INTERLUX® BRUSH EASE 433 to improve handling. See compatibility section for additional information.

PREVIOUSLY PAINTED SURFACES – POOR CONDITION: Completely remove all old antifouling paint with INTERLUX® FIBERGLASS PINTOFF® 299 for fiberglass and epoxy surfaces, INTERLUX® PINTOFF® 199 for wood and by sandblasting underwater metals to near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS – (POLYESTER or VINYLESTER)

SURFACE PREPARATION: Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202 changing rags frequently. Before liquid dries, wipe with clean dry cloth. Be sure all wax and other contamination is removed, failure to properly clean the surface will result in paint delamination. Sand any imperfections and repair with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Sanding does not remove surface contamination.

BARE FIBERGLASS – NO SAND SYSTEM: After the surface has been prepared as described above – apply one thin continuous coat of INTERLUX® AL200 FIBERGLASS PRIMER® with brush or roller. Follow label directions for overcoating. Apply two coats of this product.

BARE FIBERGLASS – SANDING SYSTEM: After the surface has been prepared as described above – sand entire surface well with 80 grit sandpaper until a flat, matte finish is obtained; wipe off sanding residue with INTERLUX® FIBERGLASS SOLVENT WASH 202™. Apply two coats of this product.

BARE WOOD: Remove any surface contamination by wiping with INTERLUX® SPECIAL THINNER 216. Sand entire surface with 80 grit sandpaper. Wipe off sanding residue with INTERLUX® SPECIAL THINNER 216. Repair any imperfections with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of this product reduced with INTERLUX® BRUSH EASE 433 (10% maximum). Apply two additional coats unreduced. Allow a minimum of 16 hours between coats. Fill seams (if necessary) with INTERLUX® SEAM COMPOUND 30 between first and second coats of antifouling paint.

UNDERWATER METALS: Contact the INTERLUX® Technical Service Department at 1-800-468-7589 for full details on how to properly primer underwater metals. Do not use on aluminum.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If swallowed:

- Immediately call a poison control center or doctor
- Do not induce vomiting unless told to do so by a poison control center or doctor
- Do not give any liquid to the person
- Do not give anything by mouth to an unconscious person

If on skin or clothing:

- Take off contaminated clothing
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice

If inhaled:

- Move person to fresh air
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible
- Call a poison control center or doctor for further treatment advice

If in eye:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat, sparks or open flames

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticides, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store for rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 230611

 Interlux and the AkzoNobel logo are trademarks of Akzo Nobel.

 **Interlux.**

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300



Department of Agriculture
STATE OF HAWAII

LICENSED

PERIOD 2015-2017 LIC. NO.

9669.201

AkzoNobel



ACT

Eliminates Paint Build Up and Heavy Sanding
Season Long Protection for Moderate to Heavy Fouling
Overcoats Existing Antifouling Paint

**KEEP OUT OF REACH OF CHILDREN
WARNING**

See Side Panel for Additional Precautionary Statements

**8890U
BROWN**

**ONE U.S. GALLON
(3.785 L)**

| | |
|--------------------|---------|
| ACTIVE INGREDIENT | |
| CUPROUS OXIDE | 41.97% |
| INERT INGREDIENTS | 58.03% |
| | 100.00% |
| COPPER AS METALLIC | 37.11% |

EPA ESTABLISHMENT NO. 2693-TX-1
EPA REGISTRATION NO. 2693-142
Contains petroleum distillates

yachtpaint.com

DISCLAIMER: The performance of any marine coating depends on many factors outside the control of International Paint LLC including the surface preparation, environmental conditions, the application, and the maintenance of the coating. Therefore, International Paint LLC cannot guarantee the suitability of this product for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED. INTERNATIONAL PAINT LLC DOES NOT WARRANT THE MERCHANTABILITY OF THE PRODUCT. INTERNATIONAL PAINT LLC'S LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, BY PURCHASE OR USE, OF THE PRODUCT, BUYER AGREES THAT THE SALE AND EXCLUSIVE REMEDY, IF ANY, IS LIMITED TO THE RETURN OF THE PURCHASE PRICE OR REPLACEMENT OF THE PRODUCT AT INTERNATIONAL PAINT LLC'S OPTION.

ACT

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRODUCT DESCRIPTION: This product uses Ablative Copolymer Technology to enable it to wash away with use, constantly exposing fresh and effective biocide. This Ablative Copolymer Technology also eliminates the build-up of old spent coatings and the heavy sanding needed to remove them. This product provides season long protection against algae, barnacles and other forms of marine fouling in waters with moderate to heavy fouling. For use in fresh, salt and brackish waters.

COMPATIBILITY: This product can be applied over existing antifouling as long as the old coating is tightly adhered and is in sound condition. When applying over conventional antifouling paints, thoroughly sand with 80 grit wet-or-dry sandpaper. Soft rosin based coatings should be removed prior to application of this product.

V.O.C.: Less than 370 grams / liter **COATS REQUIRED:** 2 coats. 3 coats on bare wood

THINNER: INTERLUX® BRUSH EASE 433 **DRY TIMES:** Touch dry 2 hours

CLEAN UP: INTERLUX® BRUSH EASE 433 77°F (25°C). To Recoat – 16 hours

THEORETICAL COVERAGE: 455sq.ft/gal/coat To Launch – minimum 16 hours.
Maximum 60 days

APPLICATION TEMPERATURE: 50°F (10°C) and above

APPLICATION SYSTEMS

PREVIOUSLY PAINTED SURFACES – GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit sandpaper; wipe surface clean with Interlux Special Thinner 216. Stir thoroughly. Touch up bare areas. Apply two full coats of this product by brush of 3/8" nap roller. Do not apply thin coats. If during application, the brush or roller drags, thin with INTERLUX® BRUSH EASE 433 to improve handling. See compatibility section for additional information.

PREVIOUSLY PAINTED SURFACES – POOR CONDITION: Completely remove all old antifouling paint with INTERLUX® FIBERGLASS PINTOFF® 299 for fiberglass and epoxy surfaces, INTERLUX® PINTOFF® 199 for wood and by sandblasting underwater metals to near white metal. Proceed with application system for bare work as described below.

BARE FIBERGLASS – (POLYESTER or VINYLESTER)

SURFACE PREPARATION: Wash entire surface thoroughly with INTERLUX® FIBERGLASS SOLVENT WASH 202 changing rags frequently. Before liquid dries, wipe with clean dry cloth. Be sure all wax and other contamination is removed, failure to properly clean the surface will result in paint delamination. Sand any imperfections and repair with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Sanding does not remove surface contamination.

BARE FIBERGLASS – NO SAND SYSTEM: After the surface has been prepared as described above – apply one thin continuous coat of INTERLUX® AL200 FIBERGLASS PRIMER® with brush or roller. Follow label directions for overcoating. Apply two coats of this product.

BARE FIBERGLASS – SANDING SYSTEM: After the surface has been prepared as described above – sand entire surface well with 80 grit sandpaper until a flat, matte finish is obtained; wipe off sanding residue with INTERLUX® FIBERGLASS SOLVENT WASH 202 (TM). Apply two coats of this product.

BARE WOOD: Remove any surface contamination by wiping with INTERLUX® SPECIAL THINNER 216. Sand entire surface with 80 grit sandpaper. Wipe off sanding residue with INTERLUX® SPECIAL THINNER 216. Repair any imperfections with INTERLUX® SURFACING AND FAIRING COMPOUND 417A/418B; sand and wipe clean. Apply first coat of this product reduced with INTERLUX® BRUSH EASE 433 (10% maximum). Apply two additional coats unreduced. Allow a minimum of 16 hours between coats. Fill seams (if necessary) with INTERLUX® SEAM COMPOUND 30 between first and second coats of antifouling paint.

UNDERWATER METALS: Contact the INTERLUX® Technical Service Department at 1-800-468-7589 for full details on how to properly primer underwater metals. Do not use on aluminum.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If swallowed:

- Immediately call a poison control center of doctor
- Do not induce vomiting unless told to do so by a poison control center or doctor
- Do not give any liquid to the person
- Do not give anything by mouth to an unconscious person

If on skin or clothing:

- Take off contaminated clothing
- Rinse skin immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice

If inhaled:

- Move person to fresh air
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible
- Call a poison control center or doctor for further treatment advice

If in eye:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD: Flammable. Keep away from heat, sparks or open flames

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticides, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store for rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

FOR CHEMICAL EMERGENCY, SPILL, LEAK, EXPOSURE OR ACCIDENT, CALL TOLL FREE: CHEMTREC 1-800-424-9300 (DAY OR NIGHT) MEDICAL ADVISORY: CONTACT YOUR LOCAL POISON CONTROL CENTER OR CALL 1-800-854-6813.

Label Rev. 230611

 Interlux and the AkzoNobel logo are trademarks of Akzo Nobel.

Interlux.

International Paint LLC.
2270 Morris Ave., Union, NJ 07083 • 908-686-1300