

HAWAII ADMINISTRATIVE RULES

TITLE 12

DEPARTMENT OF LABOR AND INDUSTRIAL RELATIONS

SUBTITLE 8

DIVISION OF OCCUPATIONAL SAFETY AND HEALTH

PART 3

CONSTRUCTION STANDARDS

CHAPTER 136.1

CRANES, DERRICKS, HOISTS, ELEVATORS, AND CONVEYORS

- §12-136.1-1 Incorporation of federal standard
- §12-136.1-2 Definitions

Historical note: Chapter 12-136.1 is based substantially upon chapter 12-135. [Eff 7/12/82; am 9/27/84; R 11/16/96], chapter 12-136 [Eff 7/12/82; am 9/22/84; am 8/5/88; am 3/22/91; am 8/10/95; am 1/26/96; R 11/16/96], chapter 12-137 [Eff 7/12/82; am 8/5/88; R 11/16/96], and chapter 12-138 [Eff 7/12/82; am 9/22/84; am 8/10/95; R 11/16/96]

**§12-136.1-1 Incorporation of federal standard.** Title 29, Code of Federal Regulations, Subpart N, entitled "Cranes, Derricks, Hoists, Elevators, and Conveyors" published by the Office of the Federal Register, National Archives and Records Administration, on February 9, 1979; April 6, 1979; and the amendments published on September 28, 1987; August 2, 1988; April 18, 1989; June 7, 1989; June 30, 1993; August 9, 1994; and August 30, 1996, are made a part of this chapter, except as provided in section 12-136.1-2. [Eff 11/16/96; am 2/8/97] (Auth: HRS §396-4)  
(Imp: HRS §396-4)

**§12-136.1-2 Certification.** Hoisting machine operators shall be certified in accordance with Title 12, Subtitle 7, Chapter 48, Hawaii Administrative Rules. [Eff 11/16/96; am 8/26/07] (Auth: HRS §396-4)  
(Imp: HRS §396-4)

**§1926.550 Cranes and derricks.**

**(a) General requirements.**

- (1) The employer shall comply with the manufacturer's specifications and limitations applicable to the operation of any and all cranes and derricks. Where manufacturer's specifications are not available, the limitations assigned to the equipment shall be based on the determinations of a qualified engineer competent in this field and such determinations will be appropriately documented and recorded. Attachments used with cranes shall not exceed the capacity, rating, or scope recommended by the manufacturer.
- (2) Rated load capacities, and recommended operating speeds, special hazard warnings, or instruction, shall be conspicuously posted on all equipment. Instructions or warnings shall be visible to the operator while he is at his control station.
- (3) [Reserved]
- (4) Hand signals to crane and derrick operators shall be those prescribed by the applicable ANSI standard for the type of crane in use. An illustration of the signals shall be posted at the job site.
- (5) The employer shall designate a competent person who shall inspect all machinery and equipment prior to each use, and during use, to make sure it is in safe operating condition.

- Any deficiencies shall be repaired, or defective parts replaced, before continued use.
- (6) A thorough, annual inspection of the hoisting machinery shall be made by a competent person, or by a government or private agency recognized by the U.S. Department of Labor. The employer shall maintain a record of the dates and results of inspections for each hoisting machine and piece of equipment.
  - (7) Wire rope shall be taken out of service when any of the following conditions exist:
    - (i) In running ropes, six randomly distributed broken wires in one lay or three broken wires in one strand in one lay;
    - (ii) Wear of one-third the original diameter of outside individual wires. Kinking, crushing, bird caging, or any other damage resulting in distortion of the rope structure;
    - (iii) Evidence of any heat damage from any cause;
    - (iv) Reductions from nominal diameter of more than one-sixty-fourth inch for diameters up to and including five-sixteenths inch, one-thirty-second inch for diameters three-eighths inch to and including one-half inch, three-sixty-fourths inch for diameters nine-sixteenths inch to and including three-fourths inch, one-sixteenth inch for diameters seven-eighths inch to 1 1/8 inches inclusive, three-thirty-seconds inch for diameters 1 1/4 to 1 1/2 inches inclusive;
    - (v) In standing ropes, more than two broken wires in one lay in sections beyond end connections or more than one broken wire at an end connection.
    - (vi) Wire rope safety factors shall be in accordance with American National Standards Institute B 30.5-1968 or SAE J959-1966.
  - (8) Belts, gears, shafts, pulleys, sprockets, spindles, drums, fly wheels, chains, or other reciprocating, rotating, or other moving parts or equipment shall be guarded if such parts are exposed to contact by employees, or otherwise create a hazard. Guarding shall meet the requirements of the American National Standards Institute B 15.1-1958 Rev., Safety Code for Mechanical Power Transmission Apparatus.
  - (9) Accessible areas within the swing radius of the rear of the rotating superstructure of the crane, either permanently or temporarily mounted, shall be barricaded in such a manner as to prevent an employee from being struck or crushed by the crane.
  - (10) All exhaust pipes shall be guarded or insulated in areas where contact by employees is possible in the performance of normal duties.
  - (11) Whenever internal combustion engine powered equipment exhausts in enclosed spaces, tests shall be made and recorded to see that employees are not exposed to unsafe concentrations of toxic gases or oxygen deficient atmospheres.
  - (12) All windows in cabs shall be of safety glass, or equivalent, that introduces no visible distortion that will interfere with the safe operation of the machine.
  - (13)
    - (i) Where necessary for rigging or service requirements, a ladder, or steps, shall be provided to give access to a cab roof.
    - (ii) Guardrails, handholds, and steps shall be provided on cranes for easy access to the car and cab, conforming to American National Standards Institute B30.5.
    - (iii) Platforms and walkways shall have anti-skid surfaces.
  - (14) Fuel tank filler pipe shall be located in such a position, or protected in such manner, as to not allow spill or overflow to run onto the engine, exhaust, or electrical equipment of any machine being fueled.
    - (i) An accessible fire extinguisher of 5BC rating, or higher, shall be available at all operator stations or cabs of equipment.
    - (ii) All fuels shall be transported, stored, and handled to meet the rules of subpart F of this part. When fuel is transported by vehicles on public highways, Department of Transportation rules contained in 49 CFR Parts 177 and 393 concerning such vehicular transportation are considered applicable.
  - (15) Except where electrical distribution and transmission lines have been de-energized and visibly grounded at point of work or where insulating barriers, not a part of or an attachment to the equipment or machinery, have been erected to prevent physical contact with the lines, equipment or machines shall be operated proximate to power lines only in accordance with the following:
    - (i) For lines rated 50 kV. or below, minimum clearance between the lines and any part of

- the crane or load shall be 10 feet;
- (ii) For lines rated over 50 kV., minimum clearance between the lines and any part of the crane or load shall be 10 feet plus 0.4 inch for each 1 kV. over 50 kV., or twice the length of the line insulator, but never less than 10 feet;
- (iii) In transit with no load and boom lowered, the equipment clearance shall be a minimum of 4 feet for voltages less than 50 kV., and 10 feet for voltages over 50 kV., up to and including 345 kV., and 16 feet for voltages up to and including 750 kV.
- (iv) A person shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means;
- (v) Cage-type boom guards, insulating links, or proximity warning devices may be used on cranes, but the use of such devices shall not alter the requirements of any other regulation of this part even if such device is required by law or regulation;
- (vi) Any overhead wire shall be considered to be an energized line unless and until the person owning such line or the electrical utility authorities indicate that it is not an energized line and it has been visibly grounded;
- (vii) Prior to work near transmitter towers where an electrical charge can be induced in the equipment or materials being handled, the transmitter shall be de-energized or tests shall be made to determine if electrical charge is induced on the crane. The following precautions shall be taken when necessary to dissipate induced voltages:
  - (a) The equipment shall be provided with an electrical ground directly to the upper rotating structure supporting the boom; and
  - (b) Ground jumper cables shall be attached to materials being handled by boom equipment when electrical charge is induced while working near energized transmitters. Crews shall be provided with nonconductive poles having large alligator clips or other similar protection,
  - (c) Combustible and flammable materials shall be removed from the immediate area prior to operations.
- (16) No modifications or additions that affect the capacity or safe operation of the equipment shall be made by the employer without the manufacturer's written approval. If such modifications or changes are made, the capacity, operation, and maintenance instruction plates, tags, or decals, shall be changed accordingly. In no case shall the original safety factor of the equipment be reduced.
- (17) The employer shall comply with Power Crane and Shovel Association Mobile Hydraulic Crane Standard No. 2.
- (18) Sideboom cranes mounted on wheel or crawler tractors shall meet the requirements of SAE J743a-1964.
- (19) All employees shall be kept clear of loads about to be lifted and of suspended loads.
- (b) Crawler, locomotive, and truck cranes.**
  - (1) All jibs shall have positive stops to prevent their movement of more than 5° above the straight line of the jib and boom on conventional type crane booms. The use of cable type belly slings does not constitute compliance with this rule.
  - (2) All crawler, truck, or locomotive cranes in use shall meet the applicable requirements for design, inspection, construction, testing, maintenance and operation as prescribed in the ANSI B30.5-1968, Safety Code for Crawler, Locomotive and Truck Cranes. However, the written, dated, and signed inspection reports and records of the monthly inspection of critical items prescribed in section 5-2.1.5 of the ANSI B30.5-1968 standard are not required. Instead, the employer shall prepare a certification record that includes the date the crane items were inspected; the signature of the person who inspected the crane items; and a serial number, or other identifier, for the crane inspected. The most recent certification record shall be maintained on file until a new one is prepared.
- (c) Hammerhead tower cranes.**
  - (1) Adequate clearance shall be maintained between moving and rotating structures of the crane and fixed objects to allow the passage of employees without harm.
  - (2) Each employee required to perform duties on the horizontal boom of hammerhead tower cranes shall be protected against falling by guardrails or by a personal fall arrest system in

- conformance with subpart M of this part.
- (3) Buffers shall be provided at both ends of travel of the trolley.
  - (4) Cranes mounted on rail tracks shall be equipped with limit switches limiting the travel of the crane on the track and stops or buffers at each end of the tracks.
  - (5) All hammerhead tower cranes in use shall meet the applicable requirements for design, construction, installation, testing, maintenance, inspection, and operation as prescribed by the manufacturer.
- (d) Overhead and gantry cranes.
- (1) The rated load of the crane shall be plainly marked on each side of the crane, and if the crane has more than one hoisting unit, each hoist shall have its rated load marked on it or its load block, and this marking shall be clearly legible from the ground or floor.
  - (2) Bridge trucks shall be equipped with sweeps that extend below the top of the rail and project in front of the truck wheels.
  - (3) Except for floor-operated cranes, a gong or other effective audible warning signal shall be provided for each crane equipped with a power traveling mechanism.
  - (4) All overhead and gantry cranes in use shall meet the applicable requirements for design, construction, installation, testing, maintenance, inspection, and operation as prescribed in the ANSI B30.2.0-1967, Safety Code for Overhead and Gantry Cranes.
- (e) Derricks. All derricks in use shall meet the applicable requirements for design, construction, installation, inspection, testing, maintenance, and operation as prescribed in American National Standards Institute B30.6-1969, Safety Code for Derricks.
- (f) Floating cranes and derricks
- (1) Mobile cranes mounted on barges.
    - (i) When a mobile crane is mounted on a barge, the rated load of the crane shall not exceed the original capacity specified by the manufacturer.
    - (ii) A load rating chart, with clearly legible letters and figures, shall be provided with each crane, and securely fixed at a location easily visible to the operator.
    - (iii) When load ratings are reduced to stay within the limits for list of the barge with a crane mounted on it, a new load rating chart shall be provided.
    - (iv) Mobile cranes on barges shall be positively secured.
  - (2) Permanently mounted floating cranes and derricks.
    - (i) When cranes and derricks are permanently installed on a barge, the capacity and limitations of use shall be based on competent design criteria.
    - (ii) A load rating chart with clearly legible letters and figures shall be provided and securely fixed at a location easily visible to the operator.
    - (iii) Floating cranes and floating derricks in use shall meet the applicable requirements for design, construction, installation, testing, maintenance, and operation as prescribed by the manufacturer.
  - (3) Protection of employees working on barges. The employer shall comply with the applicable requirements for protection of employees working onboard marine vessels specified in 1926.605.
- (g) Crane or derrick suspended personnel platforms
- (1) Scope, application and definitions -
    - (i) Scope and application. This standard applies to the design, construction, testing, use and maintenance of personnel platforms, and the hoisting of personnel platforms on the load lines of cranes or derricks.
    - (ii) Definitions. For the purposes of this paragraph (g), the following definitions apply:
      - (A) **Failure** means load refusal, breakage, or separation of components.
      - (B) **Hoist** (or hoisting) means all crane or derrick functions such as lowering, lifting, swinging, booming in and out or up and down, or suspending a personnel platform.
      - (C) **Load refusal** means the point where the ultimate strength is exceeded.
      - (D) **Maximum intended load** means the total load of all employees, tools, materials, and other loads reasonably anticipated to be applies to a personnel platform or personnel platform component at any one time.
      - (E) **Runway** means a firm, level surface designed, prepared and designated as a

- path of travel for the weight and configuration of the crane being used to lift and travel with the crane suspended platform. An existing surface may be used as long as it meets these criteria.
- (2) General requirements. The use of a crane or derrick to hoist employees on a personnel platform is prohibited, except when the erection, use, and dismantling of conventional means of reaching the worksite, such as a personnel hoist, ladder, stairway, aerial lift, elevating work platform or scaffold, would be more hazardous or is not possible because of structural design or worksite conditions.
- (3) Cranes and derricks
- (i) Operational criteria.
- (A) Hoisting of the personnel platform shall be performed in a slow, controlled, cautious manner with no sudden movements of the crane or derrick, or the platform.
- (B) Load lines shall be capable of supporting, without failure, at least seven times the maximum intended load, except that where rotation resistant rope is used, the lines shall be capable of supporting without failure, at least ten times the maximum intended load. The required design factor is achieved by taking the current safety factor of 3.5 (required under paragraph (b)(2) of this section and applying the 50 per cent derating of the crane capacity which is required by paragraph (g)(3)(i)(F).
- (C) Load and boom hoist drum brakes, swing brakes, and locking devices such as pawls or dogs shall be engaged when the occupied personnel platform is in a stationary working position.
- (D) The crane shall be uniformly level within one percent of level grade and located on firm footing. Cranes equipped with outriggers shall have them all fully deployed following manufacturer's specifications, insofar as applicable, when hoisting employees.
- (E) The total weight of the loaded personnel platform and related rigging shall not exceed 50 percent of the rated capacity for the radius and configuration of the crane or derrick.
- (F) The use of machines having live booms (booms in which lowering is controlled by a brake without aid from other devices which slow the lowering speeds) is prohibited.
- (ii) Instruments and components.
- (A) Cranes and derricks with variable angle booms shall be equipped with a boom angle indicator, readily visible to the operator.
- (B) Cranes with telescoping booms shall be equipped with a device to indicate clearly to the operator, at all times, the boom's extended length, or an accurate determination of the load radius to be used during the lift shall be made prior to hoisting personnel.
- (C) A positive acting device shall be used which prevents contact between the load block or overhaul ball and the boom tip (anti-two-blocking device), or a system shall be used which deactivates the hoisting action before damage occurs in the event of a two-blocking situation (two block damage prevention feature).
- (D) The load line hoist drum shall have a system or device on the power train, other than the load hoist brake, which regulates the lowering rate of speed of the hoist mechanism (controlled load lowering.) Free fall is prohibited.
- (4) Personnel platforms.
- (i) Design criteria.
- (A) The personnel platform and suspension system shall be designed by a qualified engineer or a qualified person competent in structural design.
- (B) The suspension system shall be designed to minimize tipping of the platform due to movement of employees occupying the platform.
- (C) The personnel platform itself, except the guardrail system and personal fall arrest system anchorages, shall be capable of supporting, without failure, its own weight and at least five times the maximum intended load. Criteria for guardrail systems

- and personal fall arrest system anchorages are contained in subpart M of this part.
- (ii) Platform specifications.
    - (A) Each personnel platform shall be equipped with a guardrail system that meets the requirements of subpart M, and, shall be enclosed at least from the toeboard to mid-rail with either solid construction or expanded metal having openings no greater than 1/2 inch (1.27cm).
    - (B) A grab rail shall be installed inside the entire perimeter of the personnel platform.
    - (C) Access gates, if installed, shall not swing outward during hoisting.
    - (D) Access gates, including sliding or folding gates, shall be equipped with a restraining device to prevent accidental opening.
    - (E) Headroom shall be provided which allows employees to stand upright in the platform.
    - (F) In addition to the use of hard hats, employees shall be protected by overhead protection on the personnel platform when employees are exposed to falling objects.
    - (G) All rough edges exposed to contact by employees shall be surfaced or smoothed in order to prevent injury to employees from punctures or lacerations.
    - (H) All welding of the personnel platform and its components shall be performed by a qualified welder familiar with the weld grades, types and material specified in the platform design.
    - (I) The personnel platform shall be conspicuously posted with a plate or other permanent marking which indicates the weight of the platform, and its rated load capacity or maximum intended load.
  - (iii) Personnel platform loading.
    - (A) The personnel platform shall not be loaded in excess of its rated load capacity. When a personnel platform does not have a rated load capacity then the personnel platform shall not be loaded in excess of its maximum intended load.
    - (B) The number of employees occupying the personnel platform shall not exceed the number required for the work being performed.
    - (C) Personnel platforms shall be used only for employees, their tools and the materials necessary to do their work, and shall not be used to hoist only materials or tools when not hoisting personnel.
    - (D) Materials and tools for use during a personnel lift shall be secured to prevent displacement.
    - (E) Materials and tools for use during a personnel lift shall be evenly distributed within the confines of the platform while the platform is suspended.
  - (iv) Rigging.
    - (A) When a wire rope bridle is used to connect the personnel platform to the load line, each bridle leg shall be connected to a master link or shackle in such a manner to ensure that the load is evenly divided among the bridle legs.
    - (B) Hooks on overhaul ball assemblies, lower load blocks, or other attachment assemblies shall be of a type that can be closed and locked, eliminating the hook throat opening. Alternatively, an alloy anchor type shackle with a bolt, nut and retaining pin may be used.
    - (C) Wire rope, shackles, rings, master links, and other rigging hardware must be capable of supporting, without failure, at least five times the maximum intended load applied or transmitted to that component. Where rotation resistant rope is used, the slings shall be capable of supporting without failure at least ten times the maximum intended load.
    - (D) All eyes in wire rope slings shall be fabricated with thimbles.
    - (E) Bridles and associated rigging for attaching the personnel platform to the hoist line shall be used only for the platform and the necessary employees, their tools and the materials necessary to do their work and shall not be used for any other purpose when not hoisting personnel.
- (5) Trial lift, inspections and proof testing.

- (i) A trial lift with the unoccupied personnel platform loaded at least to the anticipated lightweight shall be made from ground level, or any other location where employees will enter the platform to each location at which the personnel platform is to be hoisted and positioned. This trial lift shall be performed immediately prior to placing personnel on the platform. The operator shall determine that all systems, controls and safety devices are activated and functioning properly; that no interferences exist; and that all configurations necessary to reach those work locations will allow the operator to remain under the 50 percent limit of the hoist's rated capacity. Materials and tools to be used during the actual lift can be loaded in the platform, as provided in paragraphs (g)(4)(iii)(D), and (E) of this section for the trial lift. A single trial lift may be performed at one time for all locations that are to be reached from a single set up position.
  - (ii) The trial lift shall be repeated prior to hoisting employees whenever the crane or derrick is moved and set up in a new location or returned to a previously used location. Additionally, the trial lift shall be repeated when the lift route is changed unless the operator determines that the route change is not significant (i.e. the route change would not affect the safety of hoisted employees.)
  - (iii) After the trial lift, and just prior to hoisting personnel, the platform shall be hoisted a few inches and inspected to ensure that it is secure and properly balanced. Employees shall not be hoisted unless the following conditions are determined to exist:
    - (A) Hoist ropes shall be free of kinks;
    - (B) Multiple part lines shall not be twisted around each other;
    - (C) The primary attachment shall be centered over the platform; and
    - (D) The hoisting system shall be inspected if the load rope is slack to ensure all ropes are properly seated on drums and in sheaves.
  - (iv) A visual inspection of the crane or derrick, rigging, personnel platform, and the crane or derrick base support or ground shall be conducted by a competent person immediately after the trial lift to determine whether the testing has exposed any defect or produced any adverse effect upon any component or structure.
  - (v) Any defects found during inspections that create a safety hazard shall be corrected before hoisting personnel.
  - (vi) At each job site, prior to hoisting employees on the personnel platform, and after any repair or modification, the platform and rigging shall be proof tested to 125 percent of the platform's rated capacity by holding it in a suspended position for five minutes with the test load evenly distributed on the platform (this may be done concurrently with the trial lift). After proof testing, a competent person shall inspect the platform and rigging. Any deficiencies found shall be corrected and another proof test shall be conducted. Personnel hoisting shall not be conducted until the proof testing requirements are satisfied.
- (6) Work practices.
- (i) Employees shall keep all parts of the body inside the platform during raising, lowering, and positioning. This provision does not apply to an occupant of the platform performing the duties of a signal person.
  - (ii) Before employees exit or enter a hoisted personnel platform that is not landed, the platform shall be secured to the structure where the work is to be performed, unless securing to the structure creates an unsafe situation.
  - (iii) Tag lines shall be used unless their use creates an unsafe condition.
  - (iv) The crane or derrick operator shall remain at the controls at all times when the crane engine is running and the platform is occupied.
  - (v) Hoisting of employees shall be promptly discontinued upon indication of any dangerous weather conditions or other impending danger.
  - (vi) Employees being hoisted shall remain in continuous sight of and in direct communication with the operator or signal person. In those situations where direct visual contact with the operator is not possible, and the use of a signal person would create a greater hazard for the person, direct communication alone such as by radio may be used.

- (vii) Except over water, employees occupying the personnel platform shall use a body belt/harness system with lanyard appropriately attached to the lower load block or overhaul ball, or to a structural member within the personnel platform capable of supporting a fall impact for employees using the anchorage. When working over water the requirements of §1926.106 shall apply.
- (viii) No lifts shall be made on another of the crane's or derrick's loadlines while personnel are suspended on a platform.
- (7) Traveling.
  - (i) Hoisting of employees while the crane is traveling is prohibited, except for portal, tower and locomotive cranes, or where the employer demonstrates that there is no less hazardous way to perform the work.
  - (ii) Under any circumstances where a crane would travel while hoisting personnel, the employer shall implement the following procedures to safeguard employees:
    - (A) Crane travel shall be restricted to a fixed track or runway;
    - (B) Travel shall be limited to the load radius of the boom used during the lift; and
    - (C) The boom must be parallel to the direction of travel.
    - (D) A complete trial run shall be performed to test the route of travel before employees are allowed to occupy the platform. This trial run can be performed at the same time as the trial lift required by paragraph (g)(5)(i) of this section which tests the route of the lift.
    - (E) If travel is done with a rubber tired-carrier, the condition and air pressure of the tires shall be checked. The chart capacity for lifts on rubber shall be used for application of the 50 percent reduction of rated capacity. Notwithstanding paragraph (g)(3)(i)(E) of this section, outriggers may be partially retracted as necessary for travel.
- (8) Pre-lift meeting.
  - (i) A meeting attended by the crane or derrick operator, signal person(s) (if necessary for the lift), employee(s) to be lifted, and the person responsible for the task to be performed shall be held to review the appropriate requirements of paragraph (g) of this section and the procedures to be followed.
  - (ii) This meeting shall be held prior to the trial lift at each new work location, and shall be repeated for any employees newly assigned to the operation.

**§1926.551 Helicopters.**

- (a) Helicopter regulations. Helicopter cranes shall be expected to comply with any applicable regulations of the Federal Aviation Administration.
- (b) Briefing. Prior to each day's operation a briefing shall be conducted. This briefing shall set forth the plan of operation for the pilot and ground personnel.
- (c) Slings and tag lines. Load shall be properly slung. Tag lines shall be of a length that will not permit their being drawn up into rotors. Pressed sleeve, swedged eyes, or equivalent means shall be used for all freely suspended loads to prevent hand splices from spinning open or cable clamps from loosening.
- (d) Cargo hooks. All electrically operated cargo hooks shall have the electrical activating device so designed and installed as to prevent inadvertent operation. In addition, these cargo hooks shall be equipped with an emergency mechanical control for releasing the load. The hooks shall be tested prior to each day's operation to determine that the release functions properly, both electrically and mechanically.
- (e) Personal protective equipment.
  - (1) Personal protective equipment for employees receiving the load shall consist of complete eye protection and hard hats secured by chinstraps.
  - (2) Loose-fitting clothing likely to flap in the downwash, and thus be snagged on hoist line, shall not be worn.
- (f) Loose gear and objects. Every practical precaution shall be taken to provide for the protection of the employees from flying objects in the rotor downwash. All loose gear within 100 feet of the place of lifting the load, depositing the load, and all other areas susceptible to rotor downwash shall be secured or removed.

- (g)** Housekeeping. Good housekeeping shall be maintained in all helicopter loading and unloading areas.
- (h)** Operator responsibility. The helicopter operator shall be responsible for size, weight, and manner in which loads are connected to the helicopter. If, for any reason, the helicopter operator believes the lift cannot be made safely, the lift shall not be made.
- (i)** Hooking and unhooking loads. When employees are required to perform work under hovering craft, a safe means of access shall be provided for employees to reach the hoist line hook and engage or disengage cargo slings. Employees shall not perform work under hovering craft except when necessary to hook or unhook loads.
- (j)** Static charge. Static charge on the suspended load shall be dissipated with a grounding device before ground personnel touch the suspended load, or protective rubber gloves shall be worn by all ground personnel touching the suspended load.
- (k)** Weight limitation. The weight of an external load shall not exceed the manufacturer's rating.
- (l)** Ground lines. Hoist wires or other gear, except for pulling lines or conductors that are allowed to "pay out" from a container or roll off a reel, shall not be attached to any fixed ground structure, or allowed to foul on any fixed structure.
- (m)** Visibility. When visibility is reduced by dust or other conditions, ground personnel shall exercise special caution to keep clear of main and stabilizing rotors. Precautions shall also be taken by the employer to eliminate as far as practical reduced visibility.
- (n)** Signal systems. Signal systems between aircrew and ground personnel shall be understood and checked in advance of hoisting the load. This applies to either radio or hand signal systems. Hand signals shall be as shown in Figure N-1.
- (o)** Approach distance. No unauthorized person shall be allowed to approach within 50 feet of the helicopter when the rotor blades are turning.
- (p)** Approaching helicopter. Whenever approaching or leaving a helicopter with blades rotating, all employees shall remain in full view of the pilot and keep in a crouched position. Employees shall avoid the area from the cockpit or cabin rearward unless authorized by the helicopter operator to work there.
- (q)** Personnel. Sufficient ground personnel shall be provided when required for safe helicopter loading and unloading operations.

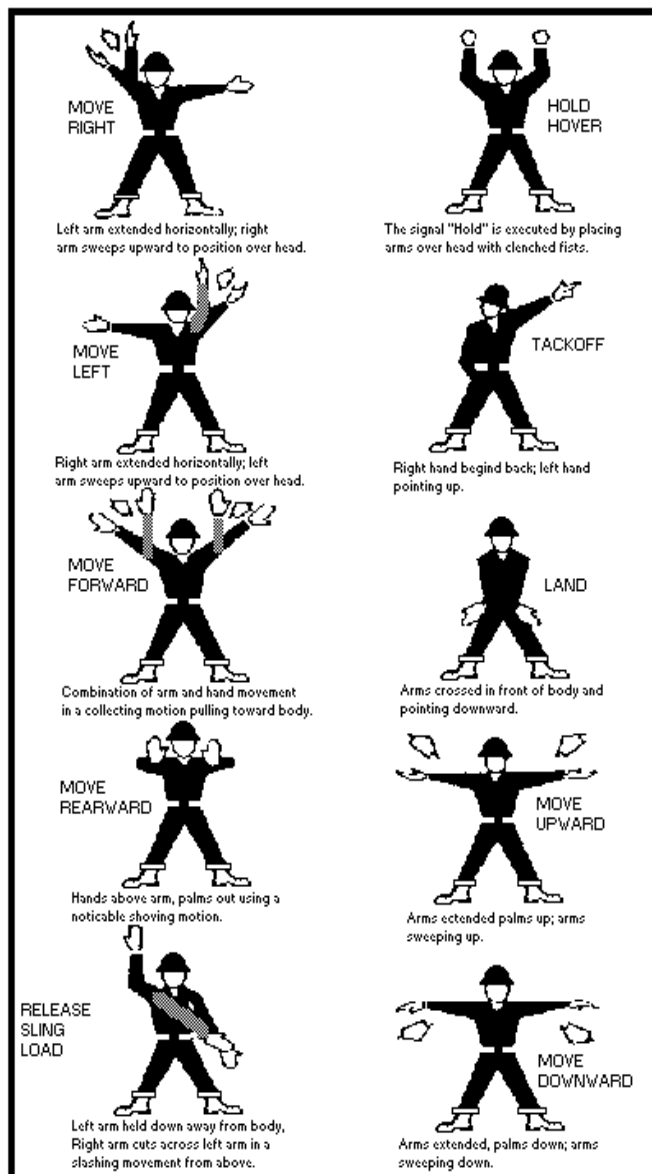


FIGURE N-1 HELICOPTER HAND SIGNAL

- (r) Communications. There shall be constant reliable communication between the pilot, and a designated employee of the ground crew who acts as a signalman during the period of loading and unloading. This signalman shall be distinctly recognizable from other ground personnel.
- (s) Fires. Open fires shall not be permitted in an area that could result in such fires being spread by the rotor downwash.

**§1926.552 Material hoists, personnel hoists, and elevators.**

**(a) General requirements.**

- (1) The employer shall comply with the manufacturer's specifications and limitations applicable to the operation of all hoists and elevators. Where manufacturer's specifications are not available, the limitations assigned to the equipment shall be based on the determinations of a professional engineer competent in the field.
- (2) Rated load capacities, recommended operating speeds, and special hazard warnings or instructions shall be posted on cars and platforms.

- (3) Wire rope shall be removed from service when any of the following conditions exists:
    - (i) In hoisting ropes, six randomly distributed broken wires in one rope lay or three broken wires in one strand in one rope lay;
    - (ii) Abrasion, scrubbing, flattening, or peening, causing loss of more than one-third of the original diameter of the outside wires;
    - (iii) Evidence of any heat damage resulting from a torch or any damage caused by contact with electrical wires;
    - (iv) Reduction from nominal diameter of more than three sixty-fourths inch for diameters up to and including three-fourths inch; one-sixteenth inch for diameters seven-eighths to 1 1/8 inches; and three thirty-seconds inch for diameters 1 1/4 to 1 1/2 inches.
  - (4) Hoisting ropes shall be installed in accordance with the wire rope manufacturers' recommendations.
  - (5) The installation of live booms on hoists is prohibited.
  - (6) The use of endless belt-type manlifts on construction shall be prohibited.
- (b) Material hoists.**
- (1)
    - (i) Operating rules shall be established and posted at the operator's station of the hoist. Such rules shall include signal system and allowable line speed for various loads. Rules and notices shall be posted on the car frame or crosshead in a conspicuous location, including the statement "No Riders Allowed."
    - (ii) No person shall be allowed to ride on material hoists except for the purposes of inspection and maintenance.
  - (2) All entrances of the hoistways shall be protected by substantial gates or bars that shall guard the full width of the landing entrance. All hoistway entrance bars and gates shall be painted with diagonal contrasting colors, such as black and yellow stripes.
    - (i) Bars shall be not less than 2- by 4-inch wooden bars or the equivalent, located 2 feet from the hoistway line. Bars shall be located not less than 36 inches nor more than 42 inches above the floor.
    - (ii) Gates or bars protecting the entrances to hoistways shall be equipped with a latching device.
  - (3) Overhead protective covering of 2-inch planking, 3/4-inch plywood, or other solid material of equivalent strength, shall be provided on the top of every material hoist cage or platform.
  - (4) The operator's station of a hoisting machine shall be provided with overhead protection equivalent to tight planking not less than 2 inches thick. The support for the overhead protection shall be of equal strength.
  - (5) Hoist towers may be used with or without an enclosure on all sides. However, whichever alternative is chosen, the following applicable conditions shall be met:
    - (i) When a hoist tower is enclosed, it shall be enclosed on all sides for its entire height with a screen enclosure of 1/2-inch mesh, No. 18 U.S. gauge wire or equivalent, except for landing access.
    - (ii) When a hoist tower is not enclosed, the hoist platform or car shall be totally enclosed (caged) on all sides for the full height between the floor and the overhead protective covering with 1/2-inch mesh of No. 14 U.S. gauge wire or equivalent. The hoist platform enclosure shall include the required gates for loading and unloading. A 6-foot high enclosure shall be provided on the unused sides of the hoist tower at ground level.
  - (6) Car arresting devices shall be installed to function in case of rope failure.
  - (7) All material hoist towers shall be designed by a licensed professional engineer.
  - (8) All material hoists shall conform to the requirements of ANSI A10.5-1969, Safety Requirements for Material Hoists.
- (c) Personnel hoists.**
- (1) Hoist towers outside the structure shall be enclosed for the full height on the side or sides used for entrance and exit to the structure. At the lowest landing, the enclosure on the sides not used for exit or entrance to the structure shall be enclosed to a height of at least 10 feet. Other sides of the tower adjacent to floors or scaffold platforms shall be enclosed to a height of 10 feet above the level of such floors or scaffolds.
  - (2) Towers inside of structures shall be enclosed on all four sides throughout the full height.

- (3) Towers shall be anchored to the structure at intervals not exceeding 25 feet. In addition to tie-ins, a series of guys shall be installed. Where tie-ins are not practical the tower shall be anchored by means of guys made of wire rope at least one-half inch in diameter, securely fastened to anchorage to ensure stability.
- (4) Hoistway doors or gates shall be not less than 6 feet 6 inches high and shall be provided with mechanical locks which cannot be operated from the landing side, and shall be accessible only to persons on the car.
- (5) Cars shall be permanently enclosed on all sides and the top, except sides used for entrance and exit that have car gates or doors.
- (6) A door or gate shall be provided at each entrance to the car that shall protect the full width and height of the car entrance opening.
- (7) Overhead protective covering of 2-inch planking, 3/4-inch plywood or other solid material or equivalent strength shall be provided on the top of every personnel hoist.
- (8) Doors or gates shall be provided with electric contacts that do not allow movement of the hoist when door or gate is open.
- (9) Safeties shall be capable of stopping and holding the car and rated load when traveling at governor tripping speed.
- (10) Cars shall be provided with a capacity and data plate secured in a conspicuous place on the car or crosshead.
- (11) Internal combustion engines shall not be permitted for direct drive.
- (12) Normal and final terminal stopping devices shall be provided.
- (13) An emergency stop switch shall be provided in the car and marked "Stop."
- (14) Ropes:
  - (i) The minimum number of hoisting ropes used shall be three for traction hoists and two for drum-type hoists.
  - (ii) The minimum diameter of hoisting and counterweight wire ropes shall be 1/2-inch.
  - (iii) Safety factors:

**MINIMUM FACTORS OF SAFETY FOR SUSPENSION WIRE ROPES**

Rope speed in feet per minute	Minimum factor of safety
50	7.60
75	7.75
100	7.95
125	8.10
150	8.25
175	8.40
200	8.60
225	8.75
250	8.90
300	9.20
350	9.50
400	9.75
450	10.00
500	10.25
550	10.45

Rope speed in feet per minute	Minimum factor of safety
600	10.70

- (15) Following assembly and erection of hoists, and before being put in service, an inspection and test of all functions and safety devices shall be made under the supervision of a competent person. A similar inspection and test is required following major alteration of an existing installation. All hoists shall be inspected and tested at not more than 3-month intervals. The employer shall prepare a certification record that includes the date the inspection and test of all functions and safety devices was performed; the signature of the person who performed the inspection and test; and a serial number, or other identifier, for the hoist that was inspected and tested. The most recent certification record shall be maintained on file.
- (16) All personnel hoists used by employees shall be constructed of materials and components that meet the specifications for materials, construction, safety devices, assembly, and structural integrity as stated in the American National Standard A10.4-1963, Safety Requirements for Workmen's Hoists. The requirements of this paragraph (c)(16) do not apply to cantilever type personnel hoists.
- (17) (i) Personnel hoists used in bridge tower construction shall be approved by a registered professional engineer and erected under the supervision of a qualified engineer competent in this field.
- (ii) When a hoist tower is not enclosed, the hoist platform or car shall be totally enclosed (caged) on all sides for the full height between the floor and the overhead protective covering with 3/4-inch mesh of No. 14 U.S. gauge wire or equivalent. The hoist platform enclosure shall include the required gates for loading and unloading.
- (iii) These hoists shall be inspected and maintained on a weekly basis. Whenever the hoisting equipment is exposed to winds exceeding 35 miles per hour it shall be inspected and put in operable condition before reuse.
- (iv) Wire rope shall be taken out of service when any of the following conditions exist:
- In running ropes, six randomly distributed broken wires in one lay or three broken wires in one strand in one lay;
  - Wear of one-third the original diameter of outside individual wires. Kinking, crushing, bird caging, or any other damage resulting in distortion of the rope structure;
  - Evidence of any heat damage from any cause;
  - Reductions from nominal diameter of more than three-sixty-fourths inch for diameters to and including three-fourths inch, one-sixteenth inch for diameters seven-eighths inch to 1 1/8 inches inclusive, three-thirty-seconds inch for diameters 1 1/4 to 1 1/2 inches inclusive;
  - In standing ropes, more than two broken wires in one lay in sections beyond end connections or more than one broken wire at an end connection.
- (d) Permanent elevators under the care and custody of the employer and used by employees for work covered by this Act shall comply with the requirements of American National Standards Institute A17.1-1965 with addenda A17.1a-1967, A17.1b-1968, A17.1c-1969, A17.1d-1970, and inspected in accordance with A17.2-1960 with addenda A17.2a-1965, A17.2b-1967.

#### **§1926.553 Base-mounted drum hoists.**

- (a) General requirements.
- Exposed moving parts such as gears, projecting screws, setscrews, chain, cables, chain sprockets, and reciprocating or rotating parts, which constitute a hazard, shall be guarded.
  - All controls used during the normal operation cycle shall be located within easy reach of the operator's station.
  - Electric motor operated hoists shall be provided with:
    - A device to disconnect all motors from the line upon power failure and not permit any motor to be restarted until the controller handle is brought to the "off" position;
    - Where applicable, an overspeed preventive device;

- (iii) A means whereby remotely operated hoists stop when any control is ineffective.
- (4) All base-mounted drum hoists in use shall meet the applicable requirements for design, construction, installation, testing, inspection, maintenance, and operations, as prescribed by the manufacturer.

(b) Specific requirements. [Reserved]

**§1926.554 Overhead hoists.**

(a) General requirements.

- (1) The safe working load of the overhead hoist, as determined by the manufacturer, shall be indicated on the hoist, and this safe working load shall not be exceeded.
- (2) The supporting structure to which the hoist is attached shall have a safe working load equal to that of the hoist.
- (3) The support shall be arranged so as to provide for free movement of the hoist and shall not restrict the hoist from lining itself up with the load.
- (4) The hoist shall be installed only in locations that will permit the operator to stand clear of the load at all times.
- (5) Air hoists shall be connected to an air supply of sufficient capacity and pressure to safely operate the hoist. All air hoses supplying air shall be positively connected to prevent their becoming disconnected during use.
- (6) All overhead hoists in use shall meet the applicable requirements for construction, design, installation, testing, inspection, maintenance, and operation, as prescribed by the manufacturer.

(b) Specific requirements. [Reserved]

**§1926.555 Conveyors.**

(a) General requirements.

- (1) Means for stopping the motor or engine shall be provided at the operator's station. Conveyor systems shall be equipped with an audible warning signal to be sounded immediately before starting up the conveyor.
- (2) If the operator's station is at a remote point, similar provisions for stopping the motor or engine shall be provided at the motor or engine location.
- (3) Emergency stop switches shall be arranged so that the conveyor cannot be started again until the actuating stop switch has been reset to running or "on" position.
- (4) Screw conveyors shall be guarded to prevent employee contact with turning flights.
- (5) Where a conveyor passes over work areas, aisles, or thoroughfares, suitable guards shall be provided to protect employees required to work below the conveyors.
- (6) All crossovers, aisles, and passageways shall be conspicuously marked by suitable signs, as required by Subpart G of this part.
- (7) Conveyors shall be locked out or otherwise rendered inoperable, and tagged out with a "Do Not Operate" tag during repairs and when operation is hazardous to employees performing maintenance work.
- (8) All conveyors in use shall meet the applicable requirements for design, construction, inspection, testing, maintenance, and operation, as prescribed in the ANSI B20.1-1957, Safety Code for Conveyors, Cableways, and Related Equipment.

**§12-136.1-2 Definitions.** As used in 29 CFR Subpart N and applied to this chapter:

"§1926.106" means section 1926.106 in chapter 12-114.2.

"§1916.605" means section 1926.605 in chapter 12-129.1.

"Subpart E" means chapter 12-114.2.

"Subpart F" means chapter 12-113.1.

"Subpart G" means chapter 12-119.1.

"Subpart M" means chapter 12-121.2.

"US DOL" means state department of labor and industrial relations. [Eff 8/26/07] (Auth: HRS §396-4) (Imp: HRS §396-4)