

LICENSED

PERIOD 2011-2013 LIC. NO.

DBNPA 100 Powder Water-Soluble Bags

FOR INDUSTRIAL USE ONLY

Active Ingredient(s)		
2,2-Dibromo-3-nitropropionamide	97.6%
Inert Ingredient(s):	2.4%
Total	100%

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with the labeling.

NOTE: ADD SOLUTIONS OF DBNPA 100 POWDER WATER-SOLUBLE BAGS SEPARATELY TO THE SYSTEM. DO NOT MIX IT WITH OTHER ADDITIVES, IN ORDER TO AVOID DECOMPOSITION OF DBNPA 100 Powder Water-Soluble Bags DUE TO THE HIGH pH OF MANY ADDITIVE FORMULATIONS.

PAPER MILLS

For the control of bacterial, fungal, and yeast growths in pulp, paper, and paperboard mills, add a solution of DBNPA 100 Powder Water-Soluble Bags at the rate of 0.03-0.10 lb. DBNPA 100 Powder Water-Soluble Bags/ton of pulp or paper (dry basis). Addition may be continuous or intermittent, depending upon the type of system and the severity of contamination. It should be made with a metering pump at a location that will insure uniform distribution of DBNPA 100 Powder Water-Soluble Bags in the mass of fiber and water, such as the beaters, Jordan inlet or discharge, broke chests, furnish chests, save-alls, and white-water tanks.

HEAVILY FOULED SYSTEMS

should be boiled out, then treated with 0.03-0.07 lb. DBNPA 100 Powder Water-Soluble Bags/ton of paper (dry basis), as necessary for control.

MODERATELY FOULED SYSTEMS

should be treated continuously with 0.07-0.10 lb. DBNPA 100 Powder Water-Soluble Bags/ton of paper (dry basis) until the slime accumulation is controlled. Addition rates can then be reduced to 0.03-0.07 lb. DBNPA 100 Powder Water-Soluble Bags/ton of paper, on a continuous or intermittent basis, as needed for control. Dislodged slime may cause breaks in the paper and a clean-up of the paper machine may be advisable.

SLIGHTLY FOULED SYSTEMS

should be treated continuously with 0.03-0.07 lb. DBNPA 100 Powder Water-Soluble Bags/ton of paper (dry basis) until slime is controlled, then added on an intermittent basis to maintain control.

COOLING TOWERS

For control of bacterial growths in cooling towers, add solutions of DBNPA 100 Powder Water-Soluble Bags to the basin (or at any other point of uniform mixing). Add 0.002-0.020 lb DBNPA 100 Powder Water-Soluble Bags/1,000 gallons of water in the system, depending on the severity of contamination. Addition should be made with a metering pump; it may be continuous or intermittent, depending on the severity of the contamination when treatment is begun, and the retention time in the system.

INTERMITTENT OR SLUG METHOD

INITIAL DOSE: When the system is noticeably fouled, add 0.01-0.02 lb. DBNPA 100 Powder Water-Soluble Bags/1,000 gallons of water in the system. Repeat until control is achieved.

SUBSEQUENT DOSES: When microbial control is evident, add 0.005-0.02 lb. DBNPA 100 Powder Water-Soluble Bags/1,000 gallons of water in the system every 4 days, or as needed to maintain control.

BADLY FOULED SYSTEMS must be cleaned before treatment.

CONTINUOUS FEED METHOD

INITIAL DOSE: When the system is noticeably fouled, add 0.01-0.02 lb. DBNPA 100 Powder Water-Soluble Bags/1,000 gallons of water in the system. Subsequently, maintain this treatment level by pumping a continuous feed of 0.001-0.010 lb. DBNPA 100 Powder Water-Soluble Bags/1,000 gallons of water lost by blow down. **BADLY FOULED SYSTEMS** must be cleaned before treatment is begun. Optimum performance with this product is attained by continuous or intermittent treatment. If "shock" treatment is used, the blow down should be discontinued for 24-48 hours.

OIL FIELD APPLICATIONS

For reduction of bacterial contamination and degradation in oil recovery operations, add DBNPA 100 Powder Water-Soluble Bags to the system at a rate of 6 to 54 ppm.

FRACTURING FLUIDS

DBNPA 100 Powder Water-Soluble Bags reduces bacterial contamination and degradation of fracturing fluids and gels used in oil and gas well stimulations. DBNPA 100 Powder Water-Soluble Bags should be added to the water storage tanks before gelling and circulated to ensure mixing. DBNPA 100 Powder Water-Soluble Bags can be pre-dissolved in warm water and added at the well head for "on-the-fly" fracturing jobs. Use all pre-dissolved liquid within 24 hours. Frequency and Dose: DBNPA 100 Powder Water-Soluble Bags should be added at a rate of 18 to 54 ppm (0.15-0.45 lbs./1,000 gallons) depending on water quality. Retreat after 48 hours if the frac job is delayed.

ENHANCED OIL RECOVERY (EOR) FLUIDS

DBNPA 100 Powder Water-Soluble Bags reduces bacteria contamination and degradation of EOR polymers and gels. DBNPA 100 Powder Water-Soluble Bags should be added to injection water before polymer addition. Frequency and Dose: DBNPA 100 Powder Water-Soluble Bags should be added at a rate of 6 to 54 ppm (0.05-0.45 lbs./1,000 gallons). Dry DBNPA 100 Powder Water-Soluble Bags should be added at a point to ensure proper dissolution and mixing.

WATER FLOOD

DBNPA 100 Powder Water-Soluble Bags can be used to control slime and corrosion causing bacteria in waters used for secondary oil and gas recovery. DBNPA 100 Powder Water-Soluble Bags can be added as a dry product or pre-dissolved in warm water. Use all pre-dissolved liquid within 24 hours. If the system is heavily fouled, slug treat at the higher rate to remove biofilm. For maintenance, batch treat two to three times per week. Frequency and Dose: DBNPA 100 Powder Water-Soluble Bags should be added at a rate of 6 to 54 ppm (0.05-0.45 lbs./1,000 gallons). Dry DBNPA 100 Powder Water-Soluble Bags should be added at a point to ensure proper dissolution and mixing.




Department of Agriculture
STATE OF HAWAII

LICENSED

PERIOD 2014-2016 LIC. NO.

9197.227

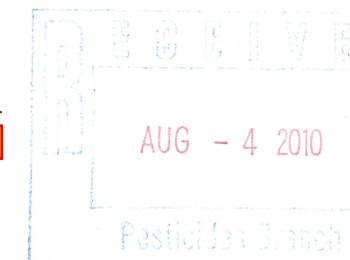

KEEP OUT OF REACH OF CHILDREN DANGER

PRECAUTIONARY STATEMENTS Hazards to Humans and Domestic Animals

DANGER

CORROSIVE • Causes irreversible eye damage • May be fatal if inhaled or swallowed • Causes skin irritation • Do Not Get In Eyes, on Skin, or on Clothing • Do not breathe dust. • When loading or handling wear protective eyewear (goggles or face shield), long-sleeved shirt and long pants, socks, shoes, chemically resistant gloves and a NIOSH approved respirator • Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals • Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. • Remove and wash contaminated clothing separately from other laundry before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Apply this product only as specified on this label. Do not contaminate water by cleaning of equipment, or disposal of wastes. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

Personal Protective Equipment

Applicators and other handlers must wear:
-coveralls, over long-sleeved shirt and long pants
-socks and chemical resistance footwear
-goggles or face shields
-chemical-resistant gloves (such as barrier laminate, butyl nitrile/neoprene rubber, pvc or viton)

Engineering Controls

When handlers use closed metering systems the handler requirements may be reduced or modified to long-sleeve shirt, long pants, shoes and socks.

User Safety Requirements

Follow manufacturers' instructions for cleaning & maintaining PPE if no such instructions exist for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

User Safety Recommendations

Users must wash hands before eating, drinking, chewing gum, or using the toilet. Users must remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Users must remove PPE immediately after handling this product. Wash the outside of gloves before removing. As soon as possible, wash thoroughly and change into clean clothing.

Application Restrictions

Do not apply this product directly in a way that will contact workers or other persons, either directly or through drift. Only protected handlers may be in the area during application.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

Pesticide Storage:

To maintain product quality, store at temperatures below 35C. Keep container tightly closed when not in use. Do not remove from container except for immediate use. When ready to use REMOVE outer plastic packaging. DO NOT remove DBNPA 100 Powder Water-Soluble Bags from water soluble bag.

Pesticide Disposal: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

Container Disposal

Nonrefillable container. Do not reuse or refill this container. Triple rinse or pressure rinse container (or equivalent) promptly after emptying. Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

90158-7127/2010-RA2272

FIRST AID

IF IN EYES	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 30 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call poison control center or doctor for treatment advice.
IF ON SKIN OR CLOTHING	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15–20 minutes. • Call a poison control center or doctor for treatment advice.
IF SWALLOWED	<ul style="list-style-type: none"> • Call poison control center or doctor immediately for treatment advice. • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person.
IF INHALED	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call an emergency responder or an ambulance, then give artificial respiration, preferably mouth-to-mouth. • Call a poison control center or doctor for further treatment advice.

Have product container or label with you when calling a poison control center or doctor or going for treatment.

HOT LINE NUMBER

IN CASE OF AN EMERGENCY endangering life or property involving this product, call collect (989)636-4400.

NOTE TO PHYSICIAN

The decision of whether to induce vomiting or not should be made by a physician. If lavage is performed, suggest endotracheal and/or esophageal control. Danger from lung aspiration must be weighed against toxicity when considering emptying the stomach. Respiratory symptoms, including pulmonary edema, may be delayed. Persons receiving significant exposure should be observed 24-48 hours for signs of respiratory distress. Maintain adequate ventilation and oxygenation of the patient. Chemical eye burns may require extended irrigation. Obtain prompt consultation, preferably from an ophthalmologist. If burn is present, treat as any thermal burn, after decontamination. No specific antidote. Treatment of exposure should be directed at the control of symptoms and the clinical condition of the patient.

Produced For

E.P.A. Registration No. 464-389

E.P.A. Est. 83434-IL-001



The Dow Chemical Company

Midland, Michigan 48674 U.S.A.

© TM Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

NET WT: 25 lb / 11.3 kg

LOT NO:

Notice: Seller warrants that this product conforms to the chemical description on the label and is reasonably fit for the purposes stated on the label when used in strict accordance with the directions. SELLER MAKES NO OTHER EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER EXPRESS OR IMPLIED WARRANTY.